

Certification Date: 17 Nov 2023 Expiration Date: 17 Nov 2028

Certificate of Inspection

For ships on international voyages this certificate fulfills the requirements of SOLAS 74 as amended, regulation V/14, for a SAFE MANNING DOCUMENT.

Vessel Name			Official Number	IMO	Number	Call Sign	Service	
CCL 29			1212829				Tank B	Barge
Hailing Port								
NEW ORLE	ANS. LA		Hull Material		Horsepower	Propulsion		
	11 to p m		Steel					
UNITED STA	ATES							
Place Built			Delivery Date	Keel Laid Date	Gross Tons	Net Tons	DWT	Length
BELLE CHA	SSE, LA		01Oct2008	02Jul200	D.735	R-735		R-200.0
UNITED STA	TEQ		010012000	VAUGIAVV	ŀ	ŀ		ю
UNITEDSTA	(IES							
		.						
Owner BANTA BAR	GE LINES LLC				perator CHEM CARRIE	ERS LLC		
1237 HWY 7	5			1	237 HIGHWA	Y 75		
SUNSHINE, UNITED STA					SUNSHINE, LA JNITED STATI			
UNITED STA	ILO			•	WHEDSIVII	E 3		
	ust be manned wi						hich there m	nust be
0 Certified Lif	eboatmen, 0 Cert	ified Ta	nkermen, 0 HSC	Type Rati	ng, and 0 GMD	OSS Operators.	,	
0 Masters		censed N		f Engineers		Oilers		
0 Chief Mates		rst Class		Assistant Eng	-			
0 Second Ma 0 Third Mates		adio Offic		nd Assistant I	_			
0 I nird Mates 0 Master Firs		ble Seam rdinary S		l Assistant En Ised Engineer	-		•	
0 Master First (eckhands		ised Engineer ified Member				•
	is vessel may can					ons in addition to	crew, and	no Others. Total
Persons allow					,		•	
Route Perm	itted And Condit	ions Of	Operation:					
Lakes,	Bays, and So	unds	plus Limited	d Coastv	vise			
Also, in fai	r weather only,	not mo	ore than twelve	(12) mile	es from shore	between St. M	arks and C	arrabelle,
Florida.	- -						•	•
This vessel	has been grante	d a fre	sh water servi	ce examina	ation interva	l per 46 CFR 3	1.10-21(a)	(2). If this
vessel is op salt water i	erated in salt .ntervals per 46	water n CFR 31	nore than 6 mon 10-21(a)(1) a	iths in any and the co	y 12 month pe gnizant OCMI	riod, the vess notified in wr	el must be iting as s	inspected using oon as this
	atus occurs.					•		
***SEE NEX	CT PAGE FOR A	DDITIO	NAL CERTIFIC	CATE INFO	ORMATION**	*		
							the Officer	in Charge, Marine
Inspection, M	arine Safety Unit <mark>F</mark>	Port Arti	nur certified the v	essel, in al				ole vessel inspection
laws and the	rules and regulation			er.				
	Annual/Period				This certifica		fa.T.	Woodman
Date 11 FEB 2025	Zoņe	A/P/R		19/		WOODMAN, CI	OR, ŪSČG,	By direction
11 LEDYCH 2	SEC HOU-BAL	<u> ^ </u>	BJEVORE THE	/-CWO	Officer in Charge, M	•		
		1			Inspection Zone	Marine Safety	Unit Port A	rthur



Certification Date: 17 Nov 2023 Expiration Date: 17 Nov 2028

Certificate of Inspection

For ships on international voyages this certificate fulfills the requirements of SOLAS 74 as amended, regulation V/14, for a SAFE MANNING DOCUMENT.

Vessel Name	Official Nun	nber	IMO Num	ber	Call Sign	Service	
CCL 29	121282	9 .				Tank E	Barge
1							
Hailing Port	Hu	II Material	Hors	epower	Propulsion		
NEW ORLEANS, LA	S	teel					
LINITED OTATEO	0	.001					
UNITED STATES							
Place Built	Deliver	y Date	Keel Laid Date	Gross Tons	Net Tons	DWT	Length
BELLE CHASSE, LA	010	ct2008	02Jul2008	R-735	R-735		R-200.0
UNITED STATES	010	CIZOUO	020012000	l-	 -		I-0
ONTEDSTATES							
		·					
Owner DARGE LINES LI			Operat		50.110		
BANTA BARGE LINES LI 1237 HWY 75	LC			M CARRIE 7 HIGHWAY			
SUNSHINE, LA 70780				ISHINE, LA			
UNITED STATES				TED STATE			
This vessel must be mann						hich there m	rust be
0 Certified Lifeboatmen, 0	Certified Tankermen	, 0 HSC	Type Rating,	and 0 GMD	SS Operators.		
0 Masters	0 Licensed Mates	0 Chief	Engineers	0 C	Dilers		
0 Chief Mates	0 First Class Pilots	0 First	Assistant Engine	ers			
0 Second Mates	0 Radio Officers	0 Seco	nd Assistant Eng	neers			
0 Third Mates	0 Able Seamen	0 Third	Assistant Engine	ers			
0 Master First Class Pilot	0 Ordinary Seamen	0 Licen	sed Engineers				
0 Mate First Class Pilots	0 Deckhands		fied Member Eng				
In addition, this vessel may Persons allowed: 0	y carry 0 Passengers,	0 Othe	r Persons in c	ew, 0 Perso	ons in addition to	crew, and	no Others. Total
Route Permitted And C	•						
Lakes, Bays, and	d Sounds plus L	imited	d Coastwis	e			
Also, in fair weather of	only, not more than	twelve	(12) miles	from shore	hetween St N	Marks and C	arrahelle.
Florida.	mily, not more enam	C#C1 VC	(12) MIICB	IIOM BHOIC	beeween be. I	iarko ana c	arraberre,
This vessel has been gr	canted a fresh wate	r servi	.ce examinati	on interva	l per 46 CFR 3	31.10-21(a)	(2). If this
vessel is operated in s	salt water more tha	n 6 mon	ths in any 1	2 month per	riod, the vess	sel must be	inspected using
salt water intervals pe		a)(1) a	ind the cogni	zant OCMI 1	notified in wr	citing as s	oon as this

SEE NEXT PAGE FOR ADDITIONAL CERTIFICATE INFORMATION

With this Inspection for Certification having been completed at Port Arthur, TX, UNITED STATES, the Officer in Charge, Marine Inspection, Marine Safety Unit Port Arthur certified the vessel, in all respects, is in conformity with the applicable vessel inspection laws and the rules and regulations prescribed thereunder.

	Annual/Peri	odic/Re-Inspe	ction	This certificate issued by:
Date	Zone	A/P/R	Signature	This certificate issued by: L. L. WOODMAN, CDR, USCG, By direction
				Officer in Charge, Manne Inspection
				Marine Safety Unit Port Arthur
	*****			Inspection Zone
				



Certification Date: 17 Nov 2023 **Expiration Date:** 17 Nov 2028

Certificate of Inspection

Vessel Name: CCL 29

---Hull Exams---

Exam Type Next Exam Last Exam

Prior Exam

DryDock

31Oct2028

22Oct2018

01Oct2008

Internal Structure

30Nov2028

17Nov2023

22Oct2013

--- Liquid/Gas/Solid Cargo Authority/Conditions ---

FLAMMABLE/COMBUSTIBLE LIQUIDS AND SPECIFIED HAZARDOUS CARGOES

Total Capacity

Units

Highest Grade Type Part151 Regulated Part153 Regulated

Part154 Regulated

11066

Yes

No

Hazardous Bulk Solids Authority

Not Authorized

Loading Constraints - Structural

Tank Number	Max Cargo Weight per Tank (short tons)	Maximum Density (lbs/gal)
1 C	647	12.8
2 C	755	12.8
3 C	671	12.8

Loading Constraints - Stability

Hull Type	Maximum Load (short tons)	Maximum Draft (ft/in)	Max Density (lbs/gal)	Route Description
1	1434	8ft 9in	15.0	
II	1524	9ft 2in	15.0	
Ш	1722	10ft 1in	15.0	
Ш	1794	10ft 5in	13.5	
Ш	1812	10ft 6in	12.0	
Ш	1920	11ft 0in	15.0	
III	1961	11ft 3in	13.5	
III	1980	11ft 4in	12.8	

Conditions Of Carriage

Only those specified hazardous cargoes named in the vessel's Cargo Authority Attachment (CAA), serial # C2-0703245, dated 18 Jun 2007, may be carried. The specified hazardous cargoes may be carried only in the tanks indicated.

Per 46 CFR 150.130, the person in charge of the vessel is responsible for ensuring the compatibility requirements of 46 CFR 150 are met. Cargoes must be checked for compatibility using figures, tables, and appendices of 46 CFR 150 in conjunction with the reactive group number from the "Compat Group No" column is listed in the vessel's CAA.

When the vessel is carrying cargoes greater than 0.5% benzene, the person in charge is responsible for ensuring the provisions of 46 CFR 197, Subpart C, are applied.

In accordance with 46 CFR 39, excluding part 39.4000, this vessel's vapor control system (VCS) has been inspected to the plans approved by Marine Safety Center letters Serial #C2-0703245 dated 18 June 2018 and found acceptable for collection

^{*}Vapor Control Authorization*



Certification Date: 17 Nov 2023 Expiration Date: 17 Nov 2028

Certificate of Inspection

Vessel Name: CCL 29

of bulk liquid cargo vapors annotated with "Yes" in the CAA's VCS column.

Stability and Trim

The maximum design density of cargo which may be filled to the tank top is 8.745 lbs/gal.

Per 46 CFR 151.10-15(c)(2), the maximum tank weights listed below reflect uniform (within 5%) loading at the deepest draft allowed. When carrying Subchapter O cargoes at shallower drafts, the barge(s) should always be loaded uniformly.

--- Inspection Status ---

Cargo Tanks

	Internal Exam	1		External Exa	am	
Tank ld	Previous	Last	Next	Previous	Last	Next
1 C	01Oct2008	22Oct2018	31Oct2028	•••	-	-
2 C	01Oct2008	22Oct2018	31Oct2028	-	-	-
3 C	01Oct2008	22Oct2018	31Oct2028	-	<u></u>	-
			Hydro Test			
Tank id	Safety Valves	S	Previous	Last	Next	
1 C	-		-	-	-	
2 C	_		-	-	-	
3 C	-		-	_	-	

---Conditional Portable Fire Extinguisher Requirements---

Required Only During Transfer of Cargo or Operation of Barge Machinery

--- Fire Fighting Equipment ---

Fire Extinguishers - Hand portable and semi-portable

Quantity

Class Type

.

40-B

END

Serial #: C2-0703245

Dated:

18-Jun-07



Certificate of Inspection

Cargo Authority Attachment

Vessel Name: CCL 29

Official #: 1212829

Shipyard: C & C Marine & Repair

Co.

Hull #: 94

46 CFR 151 Tank	Group (Chara	cteris	ics													
Tank Group Information	Cargo Identification			0	Tanks		Cargo Transfer		Environmental Control		Fire	Special Requirements					
Tnk Grp Tanks in Group	Density	Press.	Temp.	Hull Typ	Cargo Seg Tank	Туре	Vent	Gauge	Pipe Class	Cont	Tanks	Handling Space	Protection Provided	General	Materials of Construction	Elec Haz	Temp Cont
A #1, #2, #3	15	Atmos.	Amb.	1	1ii 2ii	Integral Gravity	PV	Closed	11	G-1	NR	NA	Portable	40-1(f)(1), .50-60, .50-70(a), .50-	55-1(b), (c), (e), (f), (h), (j), 56-1(a), (b), (c), (d), (e), (f), (g)	NR	No

Notes: 1. Under Environmental Control, Tanks, NR means that the tank group is suitable only for those cargoes which require no environmental control in the cargo tanks.

List of Authorized Cargoes

			_							Conditions of Carriage					
	1						Vapor Re	scovery							
Name	Chem Code	Compat Group No	Sub Chapter	Grade	Hull Type	Tank Group	App'd (Y or N)	VCS Category	Special Requirements in 46 CFR 151 General and Mat'ls of	insp. Period					
orized Subchapter O Cargoes															
onitrile	ATN	37	0	С	Ш	Α	Yes	3	No	G					
onitrile	ACN	15 ²	0	С	11	Α	Yes	4	.50-70(a), .55-1(e)	G					
onitrile	ADN	37	0	E	11	Α	Yes	1	No	G					
(C7-C9) nitrates	AKN	34 ²	0	NA	111	Α	No	N/A		G					
oethylethanolamine	AEE	8	0	Ε	111	Α	Yes	1	.55-1(b)	G					
nonium bisulfite solution (70% or less)	ABX	43 2	0	NA	Ш	Α	No	N/A	.50-73, .56-1(a), (b), (c)	G					
nonium hydroxide (28% or less NH3)	AMH	6	0	NA	111	Α	No	N/A	.56-1(a), (b), (c), (f), (g)	G					
racene oil (Coal tar fraction)	AHO	33	0	NA	11	Α	No	N/A	No	G					
tene	BNZ	32	0	С		Α	Yes	1	.50-60	G					
ene or hydrocarbon mixtures (having 10% Benzene or mo	re) BHB	32 ²	0	С		Α	Yes	1	,50-60	G					
zene or hydrocarbon mixtures (containing Acetylene and 10 zene or more)	9% BHA	32 ²	0	С	111	Α	Yes	1	.50-60, .56-1(b), (d), (f), (g)	G					
zene, Toluene, Xylene mixtures (10% Benzene or more)	BTX	32	0	B/C	111	Α	Yes	1	.50-60	G					
l acrylate (all isomers)	BAR	14	0	D	Ш	Α	Yes	2	.50-70(a), .50-81(a), (b)	G					
I methacrylate	BMH	14	0	D	111	Α	Yes	2	.50-70(a), .50-81(a), (b)	G					
raldehyde (all isomers)	BAE	19	0	С	111	Α	Yes	1	.55-1(h)	G					
phor oil (light)	CPC	18	0	D	11	Α	No	N/A	No	G					
on tetrachloride	CBT	36	0	NA	111	Α	No	N/A	No	G					
stic potash solution	CPS	5 ²	0	NA	101	Α	No	N/A	.50-73, .55-1(j)	G					
stic soda solution	CSS	5 ²	0	NA	III	Α	No	N/A	.50-73, .55-1(j)	G					
mical Oil (refined, containing phenolics)	COE	21	0	E	11	Α	No	N/A	.50-73	G					
robenzene	CRB	36	0	D	III	Α	Yes	1	No	G					
roform	CRF	36	0	NA	III	Α	Yes	3	No	G					
tar naphtha solvent	NCT	33	0	D	111	Α	Yes	1	.50-73	G					
osote	CCV	V 21 ²	0	Е	111	Α	Yes	1	No	G					
sols (all isomers)	CRS	21	0	E	Ш	Α	Yes	1	No	G					
sylate spent caustic	CSC	5	0	NA	111	Α	No	N/A	.50-73, .55-1(b)	G					
sylic acid tar	CRX	(0	E	III	Α	Yes	1	.55-1(f)	G					
onaldehyde	CTA	19 ²	0	С	II	Α	Yes	4	.55-1(h)	G					
de hydrocarbon feedstock (containing Butyraldehydes and Ipropyl acrolein)	CHG	}	0	С	111	Α	No	N/A	No	G					
ohexanone	CCH	1 18	0	D	111	Α	Yes	1	.56-1(a), (b)	G					
ohexanone, Cyclohexanol mixture	CYX	18 ²	0	E	III	Α	Yes	1	.56-1 (b)	G					
ohexylamine	CHA	7	0	D	Ш	Α	Yes	1	.56-1(a), (b), (c), (g)	G					
opentadiene, Styrene, Benzene mixture	CSB	30	0	D	III	Α	Yes	1	.50-60, .56-1(b)	G					
Decyl acrylate	IAI	14	0	E	III	Α	Yes	2	.50-70(a), .50-81(a), (b), .55-1(c)	G					

^{2.} Under Environmental Control, Handling Space, NR means that the tank group is suitable only for those cargoes which require no environmental control in the cargo handling space. NA means that the vessel does not have a cargo control space, and this requirement is not applied.

^{3.} Under Electrical Hazard Class, NA means that the tank group is suitable only for those cargoes which have no electrical hazard class requirement. NR means that the vessel has no electrical equipment located in a hazardous location.



Serial #:

C2-0703245

Certificate of Inspection

Cargo Authority Attachment

Vessel Name: CCL 29

Official #: 1212829

Page 2 of 7

Shipyard: C & C Marine & Repair Co.

Hull #: 94

Cargo Identification	Conditions of Carriage									
	1					-	Vapor R			
Name Dichlorobenzene (all isomers)	Chem Code DBX	Compat Group No 36	Sub Chapter O	Grade E	Hull Tvoe	Tank Group	App'd (Y or N)	VCS Category	Special Requirements in 46 CFR 151 General and Mat'ls of .56-1(a), (b)	Insp. Period G
1,1-Dichloroethane	DCH	36	-	C		A	Yes	3	No No	G
2,2'-Dichloroethyl ether	DEE	41	0	D			Yes		.55-1(f)	G
Dichloromethane	DCM		0	NA	<u> </u>	A	Yes	1	No No	G
	DDE	43	0			A	Yes	5	.56-1(a), (b), (c), (g)	
2,4-Dichlorophenoxyacetic acid, diethanolamine salt solution		0 1,2		E		A	No	N/A		G
2,4-Dichlorophenoxyacetic acid, dimethylamine salt solution	DAD			A	- 111	A	No	N/A	.56-1(a), (b), (c), (g)	G
2,4-Dichlorophenoxyacetic acid, triisopropanolamine salt solution	DTI	43 2	0	E	111	A	No	N/A	.56-1(a), (b), (c), (g)	G
1,1-Dichloropropane	DPB	36	0	С	- 111	A	Yes	. , 3	No	G
1,2-Dichloropropane	DPP	36	0	С	111	A	Yes	3	No	G
1,3-Dichloropropane	DPC	36	0	C		A	Yes	3	No	G
1,3-Dichloropropene	DPU	15	0	D	· II	A	Yes	4	No	G
Dichloropropene, Dichloropropane mixtures	DMX	15	0	С	. 11	Α	Yes	11	No	G
Diethanolamine	DEA	8	0	E	111	Α	Yes	1	.55-1(c)	G
Diethylamine	. DEN	7	0	С	III	Α	Yes	3	.55-1(c)	G
Diethylenetriamine	DET	7 2	0	Е	Ш	Α	Yes	1	.55-1(c)	G
Diisobutylamine	DBU	7	0	D	111	Α	Yes	3	.55-1(c)	G
Diisopropanolamine	DIP	8	0	E	111	Α	Yes	1	.55-1(c)	G
Diisopropylamine	DIA	7	0	С	11	Α	Yes	3	.55-1(c)	G
N,N-Dimethylacetamide	DAC	10	0	E	İΠ	Α	Yes	3	.56-1(b)	G
Dimethylethanolamine	DMB	8	0	D	111	Α	Yes	1	.56-1(b), (c)	G
Dimethylformamide	DMF	10	0	D	111	Α	Yes	1	.55-1(e)	G
Di-n-propylamine	DNA	7	0	С	ll	Α	Yes	3	.55-1(c)	G
Dodecyldimethylamine, Tetradecyldimethylamine mixture	DOT	7	0	E	III	Α	No	N/A	.56-1(b)	G
Dodecyl diphenyl ether disulfonate solution	DOS	43	0	#	Į.	Α	No	N/A	No	G
EE Glycol Ether Mixture	EEG	40	0	D	111	Α	No	N/A	No	G
Ethanolamine	MEA	8	0	E	III	Α	Yes	1	.55-1(c)	G
Ethyl acrylate	EAC	14	0	C	III	Α	Yes	2	.50-70(a), .50-81(a), (b)	G
Ethylamine solution (72% or less)	EAN	7	0	A	II.	A	No	N/A	.55-1(b)	G
N-Ethylbutylamine	EBA	7	0	D	111	A	Yes	3	.55-1(b)	G
N-Ethylcyclohexylamine	ECC	7	0		111	A	Yes	1	.55-1(b)	G
Ethylene cyanohydrin	ETC	20	0	 E	111	A	Yes	1	No	G
Ethylenediamine	EDA	7 2	-0		 	A	Yes	1	.55-1(c)	G
Ethylene dichloride	EDC	36 ²	0	C	111	A	Yes	1	No	
Ethylene glycol hexyl ether	EGH	40	0	E	111	A	No	N/A	No	G
Ethylene glycol monoalkyl ethers	EGC	40	0	D/E	- 111		Yes	1	No	G
Ethylene glycol propyl ether	EGP	40	0	E	III				No	G
2-Ethylhexyl acrylate	EAI	14	0	 E		A	Yes	1	.50-70(a), .50-81(a), (b)	G
Ethyl methacrylate	ETM	14			111	A .	Yes	2	.50-70(a), .50-81(a), (b)	
				D/E	111	A .	Yes	2		G
2-Ethyl-3-propylacrolein	EPA	19 2	0	E	- 111	A	Yes	1	No Section	G
Formaldehyde solution (37% to 50%)	FMS	19 ²	0	D/E		Α	Yes	1	.55-1(h)	G
Furfural Characteristic (TOC)	FFA	19	0	D	<u>III.</u>	A	Yes	1	.55-1(h)	G
Glutaraldehyde solution (50% or less)	GTA	19	0	NA	111	A	No	N/A	No	G
Hexamethylenediamine solution	HMC	7	0	E	Ш	A	Yes	1	.55-1(c)	G
Hexamethyleneimine	HMI	7	0	С	II	A	Yes	1	.56-1(b), (c)	G
Hydrocarbon 5-9	HFN		0	С	Ш	A	Yes	1	.50-70(a), .50-81(a), (b)	G
Isoprene	IPR	30	0	Α	111	Α	No	N/A	.50-70(a), .50-81(a), (b)	G
Isoprene, Pentadiene mixture	IPN		0	В	Ш	Α	No	N/A	.50-70(a), .55-1(c)	G
Kraft pulping liquors (free alkali content 3% or more)(including: Black, Green, or White liquor)	KPL	5	0	NA	Ш	Α	No	N/A	.50-73, .58-1(a), (c), (g)	G
Mesityl oxide	MSO	18 ²	0	D	Ш	Α	Yes	1	No	G
Methyl acrylate	MAM	14	0	С	111	Α	Yes	2	.50-70(a), .50-81(a), (b)	G



Serial #: C2-0703245

18-Jun-07

Certificate of Inspection

Cargo Authority Attachment

Vessel Name: CCL 29

Shipyard: C & C Marine &

Repair Co.

Hull #: 94

Official #: 1212829 Page 3 of 7

Cargo Identification)						(Condi	tions of Carriage	
							Vapor R			
Name Methylcyclopentadiene dimer	Chem Code MCK	Group No	Sub Chapter O	Grade C	Hull Type III	Tank Group A	App'd (Y or N) Yes	VCS Category 1	Special Requirements in 46 CFR 151 General and Mat'ls of No	Insp. Period G
Methyl diethanolamine	MDE	8	0	Е	Ш	Α	Yes	1	.56-1(b), (c)	G
2-Methyl-5-ethylpyridine	MEP	9	0	E	[]]	Α	Yes	1	.55-1(e)	G
Methyl methacrylate	MMM	14	0	С		Α	Yes	2	.50-70(a), .50-81(a), (b)	G
2-Methylpyridine	MPR	9	0	D	III	Α	Yes	3	.55-1(c)	G
alpha-Methylstyrene	MSR	30	0	D	Ш	A	Yes	2	.50-70(a), .50-81(a), (b)	G
Morpholine	MPL	7 2	0	D	111	Α	Yes	1	.55-1(c)	G
1- or 2-Nitropropane	NPM	42	0	D	111	A	Yes	1	,50-81	G
1,3-Pentadiene	PDE	30	0	A		A	No	N/A	.50-70(a), .50-81	G
Perchloroethylene	PER	36	0	NA		A	No	N/A	No	G
Polyethylene polyamines	PEB	7 2	0	E		A	Yes	1	.55-1(e)	G
iso-Propanolamine	MPA	8	0	E	111	A	Yes	1	.55-1(c)	G
Propanolamine (iso-, n-)	PAX	8	0	E	- III	A	Yes	1	.56-1(b), (c)	G
	IPP	7	0	A	11	A	Yes	5	.55-1(c)	G
iso-Propylamine	PRD	9	0			A	Yes	1	.55-1(e)	G
Pyridine Sodium acetate, Glycol, Water mixture (3% or more Sodium	SAP		0		III	A	No	N/A		G
Hydroxide)	SAU		0	NA		Α	No	N/A	.50-73, .56-1(a), (b), (c)	G
Sodium aluminate solution (45% or less)	SDD	5 0 1,2		NA NA	111	A	No	N/A		G
Sodium chlorate solution (50% or less)			0		111		No	N/A		G
Sodium hypochlorite solution (20% or less)	SHQ	5 0 1,2		NA		A		1	.50-73, .55-1(b)	G
Sodium sulfide, hydrosulfide solution (H2S 15 ppm or less)	SSH			NA	- 111	A	Yes			G
Sodium sulfide, hydrosulfide solution (H2S greater than 15 ppm but less than 200 ppm)	SSI	0 1,2		NA		A .	No	N/A		
Sodium sulfide, hydrosulfide solution (H2S greater than 200 ppm)	SSJ	0 1,2		NA	II	A	No	N/A		G
Styrene (crude)	STX		0	D	111	A	Yes	2	No	
Styrene monomer	STY	30	0	D	111	A	Yes	2	.50-70(a), .50-81(a), (b)	G
1,1,2,2-Tetrachloroethane	TEC	36	0	NA	III	A	No	N/A		G
Tetraethylenepentamine	TTP	7	0	E		ΑΑ	Yes	1	.55-1(c)	G
Tetrahydrofuran	THF	41	0	С	!!!	Α_	Yes		.50-70(b)	G
Toluenediamine	TDA	9	0	E	- 11	Α	No	N/A		G
1,2,4-Trichlorobenzene	TCB	36	0	E		A	Yes		No	G
1,1,2-Trichloroethane	TCM	36	0	NA	111	A	Yes	1	.50-73, .56-1(a)	G
Trichloroethylene	TCL	36 ²	0	NA		A	Yes	1	No	G
1,2,3-Trichloropropane	TCN	36	0	E	11	Α	Yes	3	.50-73, .56-1(a)	G
Triethanolamine	TEA	8 ²	0	E	Ш	A	Yes	1	.55-1(b)	G
Triethylamine	TEN	7	0	С	· II	Α	Yes	3	.55-1(e)	G
Triethylenetetramine	TET	7 2	0	E	111	Α	Yes	1	.55-1(b)	G
Triphenylborane (10% or less), caustic soda solution	TPB	5	0	NA	111	A	No	N/A		G
Trisodium phosphate solution	TSP	5	0	NA	III	Α	No	N/A	.50-73, .56-1(a), (c).	G
Urea, Ammonium nitrate solution (containing more than 2% NH3)	UAS	6	0	NA	Ш	Α	No	N/A	.56-1(b)	G
Vanillin black liquor (free alkali content, 3% or more).	VBL	5	0	NA	111	Α	No	N/A		G
Vinyl acetate	VAM	l 13	0	С	Ш	Α	Yes	2	.50-70(a), .50-81(a), (b)	G
Vinyl neodecanate	VND	13	0	Е	III	Α	No	N/A		G
Vinyltoluene	VNT	13	0	D	III	Α	Yes	2	.50-70(a), .50-81, .56-1(a), (b), (c), (G
Subchapter D Cargoes Authorized for Vapor Contr	ol									
Acetone	ACT	18 ²	D	С		Α	Yes	1		
Acetophenone	ACP	18	D	E		Α	Yes	1		
Alcohol(C12-C16) poly(1-6)ethoxylates	APU	20	D	E		Α	Yes	1		
Alcohol(C6-C17)(secondary) poly(7-12)ethoxylates	AEB	20	D	E		Α	Yes	1		
Amyl acetate (all isomers)	AEC	34	D	D		Α	Yes	1		



Serial #: C2-0703245 Dated:

18-Jun-07

Certificate of Inspection

Cargo Authority Attachment

Vessel Name: CCL 29

Shipyard: C & C Marine &

Repair Co.

Hull #: 94

Official #: 1212829

Page 4 of 7

Cargo Identification	<u> </u>							Condi	tions of Carriage	
	1	1					,	Recovery	tions of Carriage	
Name Amyl alcohol (iso-, n-, sec-, primary)	Chem Code AAI	Compat Group No 20	Sub Chapter D	Grade D	Hull Type	Tank Group A	App'd (Y or N) Yes	vcs	Special Requirements in 46 CFR 151 General and Mat'ls of	Insp. Period
Benzyl alcohol	BAL	21	 D	E			Yes	1		
Brake fluid base mixtures (containing Poly(2-8)alkylene(C2-C3) glycols, Polyalkylene(C2-C10) glycol monoalkyl(C1-C4) ethers, and their borate esters)	BFX	20	D	E		Ā	Yes	1		
Butyl acetate (all isomers)	BAX	34	D	D		Α	Yes	1		
Butyl alcohol (iso-)	IAL	20 ²	D	D		Α	Yes	∂ 1	1	
Butyl alcohol (n-)	BAN		D	D	***	Α	Yes	1	*-	
Butyl alcohol (sec-)	BAS		D	С		Α	Yes	1		,
Butyl alcohol (tert-)	BAT		D	С		Α	Yes	1		
Butyl benzyl phthalate	BPH	34	D	E		Α	Yes	1		
Butyl toluene	BUE	32	D	D		Α	Yes	1		
Caprolactam solutions	CLS	22	D	E		Α	Yes	1		
Cyclohexane	CHX	31	D	С		Α	Yes	1		
Cyclohexanol	CHN	20	D	E		A	Yes	1		
1,3-Cyclopentadiene dimer (molten)	CPD	30	D	D/E		Α	Yes	2		
p-Cymene	CMP	32	D	D		A	Yes	1 ·		
iso-Decaldehyde	IDA	19	D	E		A	Yes	1		
n-Decaldehyde	DAL	19	D	E		Α	Yes	1		
Decene	DCE	30	D			A	Yes	1		
Decyl alcohol (all isomers)	DAX	20 2	D	E		A	Yes	<u>.</u> 1		
n-Decylbenzene, see Alkyl(C9+)benzenes	DBZ	32	D	E		A	Yes	1		
Diacetone alcohol	DAA	20 ²	D	D		A	Yes	1	- P.A.	
ortho-Dibutyl phthalate	DPA	34	D	E			Yes	1		
Diethylbenzene	DEB	32	D	D			Yes	1	10-00-00-00-00-00-00-00-00-00-00-00-00-0	
Diethylene glycol	DEG	40 ²	D	E		A	Yes	1		
Diisobutylene	DBL	30	D	C		Α	Yes	1		
Diisobutyl ketone	DIK	18	D	D		A	Yes	1		
Diisopropylbenzene (all isomers)	DIX	32	D	E		A	Yes	1		
Dimethyl phthalate	DTL	34	D	E		A	Yes	1		
Dioctyl phthalate	DOP	34	D	E		A	Yes	1		
Dipentene	DPN	30	D	D			Yes	1		
Diphenyl	DIL	32	D	D/E			Yes	1		
Diphenyl, Diphenyl ether mixtures	DDO	33	D	E		A	Yes	1		
Diphenyl ether	DPE	41	D D			A	Yes			
Dipropylene glycol	DPG	40	D	ι⊏ <i>γ</i> Ε			Yes	1 1		
Distillates: Flashed feed stocks	DFF	33	D	E	*		Yes	1		
Distillates: Straight run	DSR	33	D	E						
Dodecene (all isomers)	DOZ	30	D	 D		A	Yes	1		
Dodecylbenzene, see Alkyl(C9+)benzenes	DDB	32		E		Α	Yes	1		
2-Ethoxyethyl acetate			D			Α	Yes	1		
	EEA	34	<u>D</u>	D		A	Yes	1		
Ethoxy triglycol (crude) Ethyl acetate	ETG	40	D	E		Α	Yes	1		
	ETA	34	D	<u>C</u>		Α	Yes	1		
Ethyl acetoacetate	EAA	34	D	E		<u> </u>	Yes	1		
Ethyl alcohol	EAL	20 ²	D	С		A	Yes	1		
Ethylbenzene	ETB	32	D	С		<u>A</u>	Yes	1		
Ethyl butanol	EBT	20	D	D	·····	A	Yes	1		
Ethyl tert-butyl ether	EBE	41	D	С		Α	Yes	1		
Ethyl butyrate	EBR	34	D	D		Α	Yes	1		
Ethyl cyclohexane	ECY	31	D	D		Α	Yes	1		
Ethylene glycol	EGL	20 ²	D	E		Α	Yes	1		



tes Coast Guard Dated:

Certificate of Inspection Cargo Authority Attachment

Page 5 of 7

Vessel Name: CCL 29

Official #: 1212829

Shipyard: C & C Marine &

Repair Co.

Serial #:

18-Jun-07

Hull #: 94

Cargo Identificatio		Conditions of Carriage								
		1						Recovery		T
Name	Chem	Compat Group No			Hull Type		App'd (Y or N)	VCS Category	Special Requirements in 46 CFR 151 General and Mat'ls of	Insp. Period
Ethylene glycol butyl ether acetate	EMA	34				<u> </u>	Yes	1		
Ethylene glycol diacetate	EGY	34	D	E		A	Yes	1		
Ethylene glycol phenyl ether	EPE	40	D	E		A	Yes	1		
Ethyl-3-ethoxypropionate	EEP	34	D	D		Α	Yes	1		
2-Ethylhexanol	EHX	20	D	E		Α	Yes	1		
Ethyl propionate	EPR	34	D	С		A	Yes	1		
Ethyl toluene	ETE	32	D	D		Α	Yes	1		
Formamide	FAM	10	D	E		A	Yes	1		
Furfuryl alcohol	FAL	20 ²	D	E		Α	Yes	11		
Gasoline blending stocks: Alkylates	GAK	33	D	A/C		A	Yes	11		
Gasoline blending stocks: Reformates	GRF	33	D	A/C		Α	Yes	1		
Gasolines: Automotive (containing not over 4.23 grams lead per gallon)	GAT	33	D	С		Α	Yes	1		
Gasolines: Aviation (containing not over 4.86 grams of lead per gallon)	GAV	33	D	С		Α	Yes	1		
Gasolines: Casinghead (natural)	GCS	33	D	A/C		Α	Yes	1		
Gasolines: Polymer	GPL.	33	D	A/C		Α	Yes	1		
Gasolines: Straight run	GSR	33	D	A/C		Α	Yes	1		
Glycerine	GCR	20 ²	D	E		Α	Yes	1		
Heptane (all isomers), see Alkanes (C6-C9) (all isomers)	HMX	31	D	С		Α	Yes	1		
Heptanoic acid	HEP	4	D	Е		Α	Yes	1		
Heptanol (all isomers)	HTX	20	D	D/E		Α	Yes	1		
Heptene (all isomers)	HPX	30	D	С		A	Yes	2		
Heptyl acetate	HPE	34	D	E		A	Yes	1		
Hexane (all isomers), see Alkanes (C6-C9)	HXS	31 ²	D	B/C		A	Yes	1		
Hexanoic acid	НХО	4	 D	E		A	Yes	1		
Hexanol	HXN	20		D		Α	Yes	1		
Hexene (all isomers)	HEX	30				— <u>· · ·</u>	Yes	<u>·</u> 2		
Hexylene glycol	HXG	20		E		A	Yes	1		
Isophorone	IPH	18 ²	D	 E		A	Yes	1		
Jet fuel: JP-4	JPF	33	D	E		A	Yes	 1		
	JPV	33	D	D			Yes	1		
Jet fuel: JP-5 (kerosene, heavy)	KRS	33	D	D			Yes	1		
Kerosene	MTT	34	D	D		^_	Yes	1		
Methyl alcebal	MAL	20 ²	D	C		A	Yes	1		
Methyl alcohol				D				1		
Methylamyl acetate	MAC		D			A	Yes			
Methylamyl alcohol	MAA	20	D	D		A	Yes	1		
Methyl amyl ketone	MAK		D	D	***************************************	A	Yes	1		
Methyl tert-butyl ether	MBE	41 2	D	С		A	Yes	1		
Methyl butyl ketone	MBK		D	С		A	Yes	1		
Methyl butyrate	MBU		D	С	,,	Α .	Yes	1		
Methyl ethyl ketone	MEK		D	С		A	Yes	1		
Methyl heptyl ketone	MHK		D	D		A	Yes	1		
Methyl Isobutyl ketone	MIK	18 ²	D	С		Α	Yes	1		
Methyl naphthalene (molten)	MNA		D	E		Α	Yes	1		
Mineral spirits	MNS	33	D	D		Α	Yes	1		
Myrcene	MRE	30	D	D		Α	Yes	1		
Naphtha: Heavy	NAG	33	D	#		Α	Yes	1		
Naphtha: Petroleum	PTN	33	D	#		Α	Yes	1		
Naphtha: Solvent	NSV	33	D	D		Α	Yes	1		
Naphtha: Stoddard solvent	NSS	33	D	D		Α	Yes	1		



Serial #:

C2-0703245

Dated: 18-Jun-07

Certificate of Inspection

Cargo Authority Attachment

Vessel Name: CCL 29

Shipyard: C & C Marine &

Repair Co.

Official #: 1212829

Page 6 of 7

Hull #: 94

Cargo Identifica		tions of Carriage								
								Recovery		
Name Naphtha: Varnish makers and painters (75%)	Chem Code NVM	Compat Group No 33	Sub Chapter D	Grade C	Hull Type	Tank Groun A	App'd (Y or N) Yes	VCS Category 1	Special Requirements in 46 CFR 151 General and Mat'ls of	Insp. Period
Nonane (all isomers), see Alkanes (C6-C9)	NAX	31	D	D	*****	Α	Yes	1	,	
Nonene (all isomers)	NON	30	D	D		A	Yes	2	76-40-100	
Nonyl alcohol (all isomers)	NNS	20 ²	D	E		Α	Yes	.1		
Nonyl phenol	NNP	21	D	Е		Α	Yes	1	7, 7, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,	
Nonyl phenol poly(4+)ethoxylates	NPE	40	D	E		A	Yes	1		
Octane (all isomers), see Alkanes (C6-C9)	OAX	31	D	С		A	Yes	1		
Octanoic acid (all isomers)	OAY	4	D	E		A	Yes	1	-5-10-	
Octanol (all isomers)	OCX	20 ²	D	E		Α	Yes	1		
Octene (all isomers)	OTX	30	D	C		A	Yes	2		
Oil, fuel: No. 2	OTW	33	D	D/E		A	Yes	1		
Oil, fuel: No. 2-D	OTD	33	D	D			Yes	1		
Oil, fuel: No. 4	OFR	33	D	D/E			Yes	1		
Oil, fuel: No. 5	OFV	33	D D	D/E						
						<u>A</u>	Yes	11		
Oil, fuel: No. 6	OSX	33	D	E		A	Yes	1		
Oil, misc: Crude	OIL	33	D	C/D		_ A	Yes	1		
Oil, misc: Diesel	ODS	33	D	D/E		Α	Yes	1		
Oil, misc: Lubricating	OLB	33	D	E		Α	Yes	1		
Oil, misc: Residual	ORL	33	D	E		Α	Yes	11	•	
Oil, misc: Turbine	ОТВ	33	D	E		Α	Yes	1		
Pentane (all isomers)	PTY	31	D	Α		Α	Yes	5		-
Pentene (all isomers)	PTX	30	D	Α		Α	Yes	5		
alpha-Pinene	PIO	30	D	D		Α	Yes	1		
beta-Pinene	PIP	30	D	D		Α	Yes	1		
Poly(2-8)alkylene glycol monoalkyl(C1-C6) ether	PAG	40	D	E		Α	Yes	1		
Poly(2-8)alkylene glycol monoalkyl(C1-C6) ether acetate	PAF	34	D	Е		Α	Yes	1		
Polybutene	PLB	30	D	E	~	Α	Yes	1		~~~
Polypropylene glycol	PGC	40	D	E		Α	Yes	1		
iso-Propyl acetate	IAC	34	D	С		Α	Yes	1		
n-Propyl acetate	PAT	34	D	С		Α	Yes	1		
iso-Propyl alcohol	IPA	20 ²	D	С		A	Yes	1		
n-Propyl alcohol	PAL	20 ²	D	C		A	Yes	1		
Propylbenzene (all isomers)	PBY	32	D	D		Α	Yes	1		
iso-Propylcyclohexane	IPX	31	D	D		A	Yes	1		
Propylene glycol	PPG	20 2		E		A	Yes	1	*	
Propylene glycol methyl ether acetate	PGN	34	D	D		A	Yes	1		
Propylene tetramer	PTT	30	D	D		A				
Sulfolane		***************************************					Yes	1		
· · · · · · · · · · · · · · · · · · ·	SFL	39 40		E		<u> </u>	Yes	1 .		
Tetraethylene glycol	TTG		D	E		Α .	Yes	1		
Tetrahydronaphthalene	THN	32	D	E		<u> </u>	Yes	1		
Toluene	TOL	32	D	<u>C</u>		Α	Yes	1		
Tricresyl phosphate (less than 1% of the ortho isomer)	TCP	34	D	E		A	Yes	11		
Triethylbenzene	TEB	32	D	E		Α	Yes	1	Alexander and a second a second and a second a second and	***************************************
Triethylene glycol	TEG	40	D	E		Α	Yes	11		
Triethyl phosphate	TPS	34	D	E		Α	Yes	1		
Trimethylbenzene (all isomers)	TRE	32	D	{D}		Α	Yes	1		
Trixylenyl phosphate	TRP	34	D	Е		Α	Yes	1		
Undecene	UDC	30	D	D/E		Α	Yes	1		
1-Undecyl alcohol	UND	20	D	E		Α	Yes	1		
Xylenes (ortho-, meta-, para-)	XLX	32	D	D		Α	Yes	1		



Department of Homeland Security **United States Coast Guard**

Dated:

Serial #: C2-0703245

18-Jun-07

Certificate of Inspection

Cargo Authority Attachment

Vessel Name: CCL 29

Official #: 1212829

Page 7 of 7

Shipyard: C & C Marine

Hull #: 94

Explanation of terms & symbols used in the Table:

Cargo Identification

Name

Chem Code

Compatability Group No.

Note 1

Note 2

The proper shipping name as listed in 46 CFR Table 30.25-1, 46 CFR Table 151.05, and 46 CFR Part 153 Table 2.

The three letter designation assigned to the cargo in the Chemical Hazards Response Information System (CHRIS) Manual. Certain mixtures of cargoes may not have a CHRIS Code assigned.

The cargo reactive group number assigned for compatibility determinations in 46 CFR Part 150 Tables I and II. In accordance with 46 CFR 150.130, the Person-in-Charge of the barge is responsible for ensuring that the compatibility requirements of 46 CFR 150 are met. Cargoes must be checked for compatibility using the figures, tables, and appendices of 46 CFR 150 in conjunction with the assigned reactive group number.

Because of the very high reactivity or unusual conditions of carriage or potential compatibility product is not assigned to a specific group in the Compatibility.

Chart. For additional compatibility information, contact Commandant (CG-3PSO-3), U.S. Coast Guard, 2100 Second Street, SW, Washington, DC 20593-0001. Telephone

See Appendix I to 46 CFR Part 150 - exceptions to the compatability chart.

Subchapter Subchapter D

Subchapter O Note 3

The subchapter in Title 46 Code of Federal Regulations under which the cargo has been classified.

Those flammable and combustible liquids listed in 46 CFR Table 30.25-1

Those hazardous cargoes listed in 46 CFR Table 151.05 and 46 CFR Part 153 Table 2.

Those cargoes listed in 46 CFR Part 153 Table 2 are non-regulated cargoes when carried in bulk on non-oceangoing barges

A. B. C

Note 4

NA

Hull Type

NA

not verified by manufacturers data. The Person-in-Charge shall verify the cargo grade based on Manufacturers data and ensure that the barge is authorized for carriage of that grade of cargo. Flammable liquid cargoes, as defined in 46 CFR 30-10.22 Combustible liquid cargoes, as defined in 46 CFR 30-10.15.

The flammability/combustibility grade of these cargoes may vary depending upon the flashpoint and Reid vapor pressure. The Person-in-Charge shall verify the cargo grade based on Manufacturers data and ensure that the barge is authorized for carriage of that grade of cargo.

The cargo classification assigned to each flammable or combustible liquid. Grades inside of "{ }" indicate a provisional assignment based upon literature sources which were

Those subchapter O cargoes which are not classified as a flammable or combustible liquid.

No flammability/combustibility grade has been assigned yet, as the necessary flash point/vapor pressure data for such assignments are presently not available.

The required barge hull classification for carriage of the specified Subchapter O hazardous material cargo, see 46 CFR 151,10-1,

Designed to carry products which require the maximum preventive measures to preclude the uncontrolled release of the cargo. See 46 CFR 151.10-1(b)(1). Designed to carry products which require significant preventive measures to preclude the uncontrolled release of cargo. See 46 CFR 151.10-1(b)(3). Designed to carry products of sufficeint hazard to require a moderate degree of control. See 46 CFR 151.10-1(b)(4).

Not applicable to barges certificated under Subchapter D.

Conditions of Carriage

Tank Group Vapor Recovery Approved (Y or N) The vessel's tank group (as defined in Section 4) which is authorized for carriage of the named cargo

Yes: The vessel's VCS has been reviewed and approved by the MSC to control vapors of the specified cargo No: The vessel's VCS has been reviewed and is not approved by the MSC to control vapors of the specified cargo.

Conditions of Carriage

Vapor Recovery Approved (Y or N) The vessel's tank group (as defined under the "46 CFR Tank Group Characteristics" listed on page 1) which is authorized for carriage of the named cargo.

Yes: The vessel's VCS has been reviewed and approved by the MSC to control vapors of the specified cargo No: The vessel's VCS has been reviewed and is not approved by the MSC to control vapors of the specified cargo.

VCS Category:

Category 1

The specified cargo's provisional classification for vapor control systems.

(No additional VCS requirements above those for benzene, gasolines and crude oil) All requirements applying to the handling of oil and hazardous materials in Titles 33 and 46 Code of Federal Regulations (CFR) apply to these cargoes. Those specifically dealing with vapor control systems are in 33 CFR 155.750, 33 CFR 156.120, 33 CFR 156.170, 46 CFR 35.35 and 46 CFR 39. The cargo tank venting system calculations (46 CFR 39.20-11) and the pressure drop calculations (46 CFR 39.30-1(b)) must use appropriate friction factors, vapor densities and vapor growth rates.

Category 2

(Polymerizes) Polymerization and residue build-up of these cargoes can adversely affect the vessel by fouling safety components and restricting vapor flow which could lead to cargo tank overpressurization. The vessel's owner must develop a method of ensuring all VCS safety components are functional and polymer build-up is not causing an unsafe condition due to increased pressure in the vapor control piping and cargo tanks. The method shall be acceptable to the local Officer in Charge, Marine Inspection. This is in addition to the requirements of Category 1. Please note that a material not normally considered a monomer can be a problem in detonation arrester

Category 3

(Highly toxic) VCSs for these toxic cargoes cannot use a spill valve or rupture disk as the primary means to meet the overfill protection requirement of 46 CFR 39.20-9. This requirement is in addition to the requirements of Category 1

Category 4

(Polymerizes and highly toxic) Must comply with requirements of Categories 1, 2 and 3.

Category 5

(High vapor pressure) VCS pressure drop calculations for cargoes with a vapor pressure greater than 14.7 psia at 115 F must take into account increased vapor-air mixture densities and vapor growth rates as compared to Category 1 cargoes. Consult the Marine Safety Center's VCS Guidelines for further information. This requirement is in addition to the requirements of Category 1.

Category 6

(High vapor pressure and highly toxic) Must comply with requirements of Categories 1, 3 and 5. (High vapor pressure and polymerizes) Must comply with requirements of Categories 1, 2 and 5.

Category 7 none

The cargo has not been evaluated/classified for use in vapor control systems.



UNITED STATES OF AMERICA

DEPARTMENT OF HOMELAND SECURITY UNITED STATES COAST GUARD

NATIONAL VESSEL DOCUMENTATION CENTER

CERTIFICATE OF DOCUMENTATION

VESSEL NAME		OFFICIAL NUMBER		IMO OR OTHER	NUMBER		YEAR COMPLETED							
CCL 29	是其EKL集集事	1212829	N gra	094			2008							
HAILING PORT		HULL MATERIAL					MECHANICAL PROPULSION							
NEW ORLEANS LA		STEEL				NO								
GROSS TONNAGE	NET TONNAGE	CATE VIOLE	LENG	ГН	BREADTH		DEPTH							
GINAL CERMIN		2.4.1. (5)至中省。原					and the steer situation							
CERTIFICATE W														
735 GRT	735 NRT		200.0	^	35.0		12.5							
PLACE BUILT	New York William	XXX			- Marie									
		WINTE		1//>	(
BELLE CHASSE LA		N) THE LEE		V//\			15-10 图6124							
OWNERS	C A see	OPERATIONAL ENDORSEMENTS												
BANTA BARGE LINES LLC		COAS	STWISE		Lund									
CONTACT CERTIFIC					Part No.									
	X A	· De l		11	1	. 15								
	11/2	ME	THE STATE OF THE S	JA	1//	1								
	11 300 -		FA	103		>								
			THE REAL PROPERTY.	A B AND	A.A.	1								
					I A	-								
) 1									
MANAGING OWNER					4 1	-								
BANTA BARGE LINES LLC				3 4	- 8									
1237 HWY 75														
SUNSHINE LA 70780						1								
斯沙斯州						11								
			6			1								
DESTRUCTIONS			TU		g Alex	F								
RESTRICTIONS NONE	A Principal Control of the Control o		A STATE OF THE PARTY OF THE PAR			The same								
ALL TO A TENOR OF A			1		//	1								
SECATE OF GA		CAR / C				1								
GNAL-OF THAT	District the second	4				1								
L-CERTIFICATION	VIOLENIA OF		STREET, SQUARE,		1									
ENTITLEMENTS			CAROL STATE	7/		- 9								
NONE		- X () / /	1	7	- Andrews									
E ALEET I			No.											
REMARKS			Cas III											
NONE														
ISSUE DATE		(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)												
AUGUST 07, 2025														
AUGUST 07, 2025														
THE CERTIFICATE EVENE		EN PERSONAL PROPERTY.					QQ QQ							
THIS CERTIFICATE EXPIRES						SATES CO.								
OFDITMBED 00, 0000		Christan	11.2	14			1 1 1 1 1 1 1 1 1 1							
SEPTEMBER 30, 2026			The state of the s											
	Malight Alex	DIRECTOR, NATIO	NAL VE	SSEL DOCUME	NTATION CE	ENTE	R							
							STOP							



Logout

Click on the Document Icon of to the left of a record to display a COFR Confirmation in html. You may print the COFR Confirmation by right clicking your mouse and selecting "print" from the list.

VESSEL NAME

VESSEL TYPE HULL TYPE

GROSS TONNAGE COFR NUMBER

EFFECTIVE DATE

EXPIRATION DATE

COFR APPLICANT

INSURANCE CANCEL

Q CCL 29 **TANKBARGE D**

793

841310 - 21 9/22/2023 9/22/2026 CHEM CARRIERS, D1212829

FLAG

< Prev Next >

<u>USCG Home • Privacy Policy • Customer Accessibility</u>

Contact the Accessibility Coordinator for comments and inquiries about accessibility.

Version 3.7 -- This version is designed for Internet Explorer, Edge, Chrome, Firefox and Safari.




BARGE VAPOR TIGHTNESS LETTER

NOTE: Test results are valid for	(1) one year from date of test
• Test date:	2-25
Barge owner: CHEM CAR	LRIERS
Barge Name/Official Number: _ CCC-	29/1212829
	3500 (BYH)
→ Pressure cargo tanks and vapor system to (Manometer to record the time and pressur Remain pressure for (30) thirty minutes. Us (30) thirty minutes, record pressure and tir	re. Close all valves and allow the vessel to se soap to test and inspect for leaks. After mes.
	em to $\frac{28}{}$ inches of water.
\rightarrow Start Time:/7:45	Beginning Pressure: <u>28</u>
\rightarrow End Time: $\frac{18:15}{}$	Ending Pressure: 27.8
to be vapor tight.	e with Section 61.304f and has been found to Location:
KSOLV Maritima	Channelview TX
Name of Tester (Print):	Signature of Tester:
Victor Praciado	Victor Raciado
Name of Witness (Print):	Signature of Witness:
Affiliation/Company of Witness (Print)	Joshua Mojamo
Opara for / Kroh	




BARGE PIPING LETTER

INSTURCTIONS: ALL FIELDS ARE REQUIRED. USE N/A ON ANY NON-APPLICABLE LINE.
BARGE OWNER/BARGE NAME: Chan Curios / CCL-29 Letter expiration date (one year from test date): 10 -2 - 2026
NOTE: Test results are valid for (1) year from the date of test.
 Cargo Piping and Valves (actual date of test):
Percent of Accuracy (%):
4. Steam Piping and Relief Valves (actual date of test):
Test Pressure (125 psi):
Signature of Tester: Victor Praciado
Printed Name of Tester: Victor Praciado
Company/Location of Tester: KSOLV Manitma Knanglygert

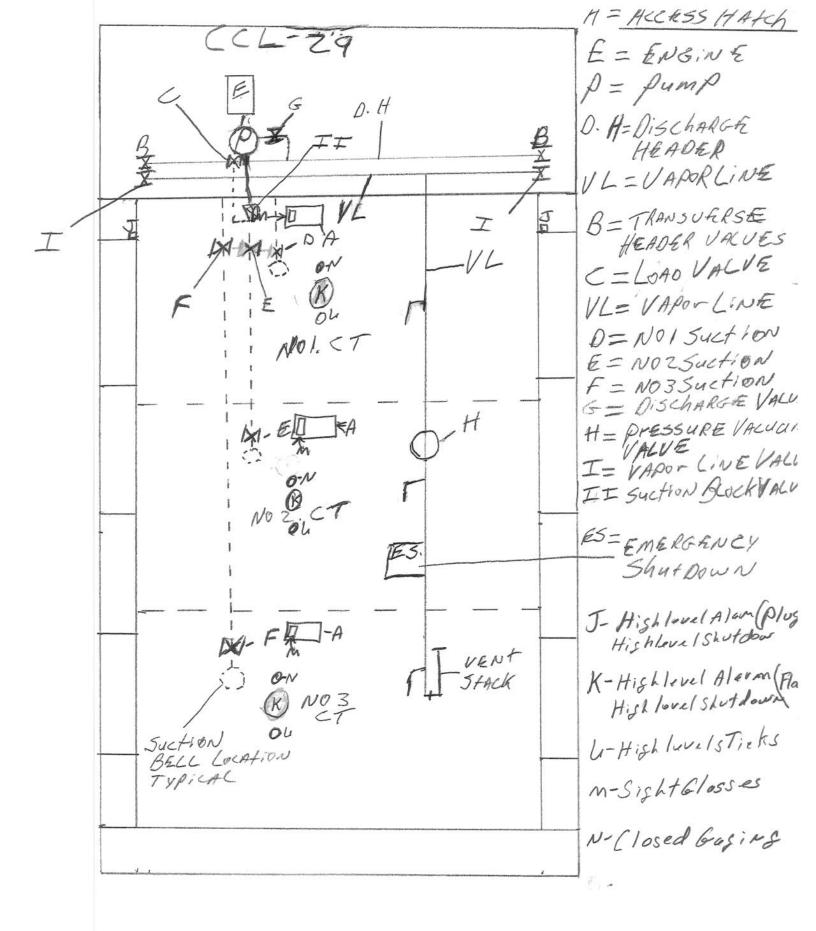

CCL 29 Cargo & Vapor Piping

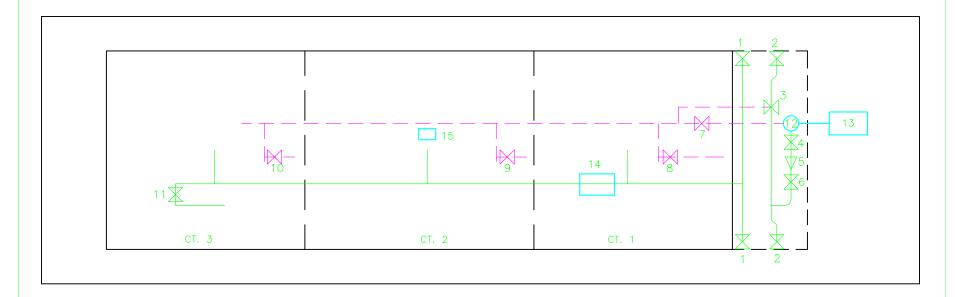


					Parts List			
ITEM	QTY	NAME	ITEM	QTY	NAME	ITEM	QTY	NAME
1	2	Vapor Header Valve	7	1	Master Suction Valve	13	1	Pump Engine
2	2	Cargo Header Valve	8	1	No. 1 Cargo Tank Valve	14	1	High Velocity PV Valve
3	1	Drop Valve / Load	9	1	No. 2 Cargo Tank Valve	15	1	Emergency Shutdown
		Valve	10	1	No. 3 Cargo Tank Valve			
4	1	Pressure Release Valve	11	1	Vent Stack Valve			
5	1	Pump Discharge Check	12	1	Deep Well Pump			
		Valve		•		_		
6	1	Pump Discharge Valve						Edited 07/13/2020



LAW VALVE of TEXAS

13702 Force Street Houston, TX 77015 PHONE 713-453-0413 FAX 713-453-3535

SHOP ORDER AND TEST REPORT
CUSTOMER Chem Carriers ORDER#
MAKE ERL SIZE 6" MODEL # SUPERAC
SERIAL # 2562 INLET 6" 150 OUTLET N/A
CONSTRUCTION: CONVENTIONAL SPILL SINTERNAL SPILOT PILOT PILOT
CAP: PLAIN OPEN LEVER BELLOWS
TAG CCL 29 SET PRESSURE 3. Ops = \$3. Ops = \$40
LOCATION ORIFICE N/A
WORK REQUIRED: ☐TEST ONLY ☐TEST & RESET ☐PRETEST REQUIRED ☐COMPLETE OVERHAUL ☐TEST AIR LAST REPAIR DATE
CONDITION RECEIVED: INITIAL POP LEAKED AT
GENERAL CONDITION PRE-REPAIR: INLET: SEATS: GUIDE: OUTLET:
☑DIRTY ☐FOULED ☐FOULED ☑DIRTY
□PLUGGED □CUT ☑DIRTY □PLUGGED □FLANGE PITTED □CORRODED □FLANGE PITTED
☐ GOOD COND ☐ CORRODED ☐ FLANGE PITTED ☐ GOOD COND. ☐ GOOD COND.
GOOD COND GOOD COND
SPRING: CORRODED BROKEN GOOD COND WEAK
WORK ØST □O/T
REPAIRS: ALAPPED SEATS MACH. DISC. MACH. NOZZLE MACH. FLANGE REPLACED GASKETS
PARTS REPLACED AND OTHER WORK: See A-Hacked Parts list.
FINAL TEST REPORT DATE 9-23-2013
SET PRESSURE 3. OPSI PRESSURE & 3. OPSI VACUM
NOZZLE RING SETTING N/A GUIDE SETTING N/A
BACK PRESSURE N/A
TESTED BY Gun Kno WITNESS BY Kallet Lauf
U.S. COAST GUARD WITNESS





LAW VALVE of TEXAS

13702 Force Street Houston, TX 77015 PHONE 713-453-0413 FAX 713-453-3535

SHOP ORDER AND TEST REPORT
CUSTOMER Chem Carriers ORDER# MAKE Consolidated Size 4" x 6" MODEL# 1910 PC SERIAL# SA14859 INLET 4" 300 OUTLET 6" 150 CONSTRUCTION: **XCONVENTIONAL SPILL SINTERNAL SPILOT PN CAP: **XPLAIN SIZE 4" x 6" MODEL# 1910 PC SET PRESSURE 1250 T LOCATION ORIFICE P WORK REQUIRED: **ITEST ONLY STEST AIR LAST REPAIR DATE SEN SEN SEN SEN SEN SEN SEN SEN SEN SE
GENERAL CONDITION PRE-REPAIR: INLET: SEATS: GUIDE: OUTLET: DIRTY FOULED FOULED DIRTY PLUGGED CUT DIRTY PLUGGED FLANGE PITTED DIRTY CORRODED FLANGE PITTED GOOD COND GOOD COND GOOD COND SPRING: CORRODED BROKEN GOOD COND WEAK WORK ST O/T REPAIRS: ALAPPED SEATS MACH, DISC. MACH, NOZZLE MACH, FLANGE PARTS REPLACED AND OTHER WORK:
FINAL TEST REPORT DATE 9-23-2013 SET PRESSURE 1250SI PRESSURE NOZZLE RING SETTING 5 down Guide SETTING NA BACK PRESSURE 30 DSI TESTED BY ARROWITNESS WITNESS BY Rabet Down U.S. COAST GUARD WITNESS

CARGO TRANSFER PROCEDURES

CHEM CARRIERS L.L.C.

TRANSFER FROM BARGE TO DOCK

PARTS

- 1. PRODUCTS TRANSFERRED
- 2. DESCRIPTION OF SYSTEM
- PERSONS ON DUTY
- 4. PERSONS IN CHARGE
- 5. EMERGENCY SHUTDOWN
- 6. TOPPING OFF PROCEDURE
- 7. COMPLETION OF TRANSFER
- 8. REPORTING CARGO SPILLS
- 9. VESSEL CLOSURES
- 10. PRODUCT DATA
- 11. Vapor Control Procedures
- 12. Inert system

Barge CCL 29

PARTS 1. PRODUCTS TRANSFERRED

33 CFR 155.750 (a) (1) (i)

This vessel is certificated for the carriage of grades "A" and lower Sub-Chapter (D) and (O) Products. It has also been certified to carry vapor products. Reference Certificate of Inspection.

PARTS 2. DESCRIPTION OF CARGO TRANSFER SYSTEM

33 CFR 155.750 (a) (2) (i) (ii)

The cargo transfer procedures apply to all Chem Carrier L.L.C. owned or leased tank barges. In most cases other than series built barges, the cargo piping arrangement is usually slightly different on every barge, and for this reason, the piping diagram must be studied before loading or discharging a barge. The basic concept for loading and discharging is fairly standard depending on the location of the pump.

- A. (Reference the piping diagram for transfer system arrangement.)
- B. PROCEDURES FOR THE CONTAINMENT SYSTEM
 - 33 CFR 155.310 (a) (1) (iv)
 - 33 CFR 155.750 (a) (2) (iii)
 - The containment pans are equipped with a drain for the removal of slops to shore facilities: NEVER DRAIN THE CONTAINMENT TANKS ONTO THE DECK.
 - 2). CCL 29 is equipped with a separate containment area for

the cargo trunk top and the forward deck area. Each containment area is equipped with drains and scupper plugs. Plugs should be installed prior to cargo transfer and removed after the cargo transfer is complete. PIC should notify Chem Carriers when containment areas need cleaning or if scupper plugs need replacing. Never Drain Product captured in containment area overboard.

PARTS 3. PERSONS ON DUTY DURING TRANSFER

33 CFR 155.750 (a) (3)

Number of persons required on duty during transfer operations:

A. At no time during the transfer operation will be less than one responsible person on duty. The certified tankerman assigned shall be in charge and responsible for the safe transfer of cargo.

PARTS 4. PERSONS IN CHARGE

The tankerman (person in charge) is responsible for transferring cargo and carrying out related operations on board in an efficient, safe, and pollution free manner. The tankerman whether employed by the towboat, owner, operator, a shore tankerman service, or Chem Carriers L.L.C., shall comply with all Coast Guard, State and local regulations. Tankerman's responsibility shall include but not be limited to the following:

- A. To have on his/her person a valid merchant marine document endorsed as tankerman, certified to handle the grade of cargo to be transferred.
- B. Make a thorough inspection of the barge prior to the start of transfer operation.
- C. To have proper connection of the grounding cable.
- D. The vessel's moorings are adequate to hold during all expected conditions of surge, current, wind, tide, ect., and lines are long enough to allow for surge, tide, wind, changes in draft ect.
- E. Proper hose sizes, lengths, support, and connections.
- F. The condition of fire extinguishers and required number.
- G. The person in charge of transfer operations on the transferring vessel or facility and the person in charge of transferring operations on the receiving vessel or facility agree to begin the transfer operations.
- H. The transfer operation between tank barges and dock facilities should be lighted between sunset and sunrise to comply with the U. S. Coast Guard regulation pertaining to the displaying of lights on barges as required by Title 33.
- The PIC (PERSON IN CHARGE) will be responsible for the DOI (declaration of inspection) and DOS (declaration of security).
- J. Always maintain communications with dock or shore personnel with an agreed upon approved system.

PARTS 5: EMERGENCY SHUTDOWN

33 CFR 155.750 (a) (6)

THE EMERGENCY SHUTDOWN IS LOCATED NEAR THE CENTER OF THE BARGE.

- A. In the event of an emergency, transfer operations can be stopped by pulling the remote shutdown cable.
- B. Familiarize yourself with its location and operation prior to transfer.

PARTS 6;

TOPPING OFF PROCEDURES

33 CFR 155.750 (a) (7)

In the process of topping off, tanks should be loaded at different levels to top off one at a time. Extra care should be taken to avoid over pressuring the connections, and hoses by closing valves against the receiving line. Since barges and facilities vary in their systems, no standard for topping off exist, but the following should be considered:

- A. The closing of one tank increases the rate of flow to other tanks on the same line.
- B. Always consider temperature and cargo in accordance with the amount of expansion that should be allowed.
- C. Always maintain communications with dock or shore personnel.
- D. A set of dipstick overfill devices have been installed on the CCL 29. Dipsticks can be made operational by releasing the covers or caps. Dipsticks should be used as a visual aid for overfill protection.

PARTS 7: COMPLETION OF TRANSFER

33 CFR 155.750 (a) (8)

Upon the completion of the transfer all pipelines should be drained into cargo tanks. The header valve used during the operation should then be closed, sealed off with a blind flange and shore personnel should seal lines and hatches on vessel.

PARTS 8:

REPORTING CARGO SPILLS

33 CFR 155.750 (a) (9)

Should an accidental discharge of product occur, you should consider the following:

A. Locate the source of the spill and try to stop it, if possible, and safe to do so.

- B. Make an attempt to contain the product if possible.
- C. Notify the Coast Guard. The national Response Center at 1-800-424-9300.
- E. Notify Chem Carriers L.L.C. at (225) 642-0060
- F. If loading, transfer the cargo from the leaking tank to an adjacent tank or back to the dock if safe to do so.
- G.If discharging, pump the product from the leaking tank as quickly as possible if safe to do so.

*When reporting a spill, the tankerman should provide the following information:

- A. Name (his or her)
- B. Name of Company: (employed by; (contracted by;
- C. Name of Barge.
- D. Spill Location
- E. Specify Product.
- F. Estimate Quantity of Spill
- G. Weather, Tide, Sea and Current Conditions.
- H. Cause of Spill.
- I. Action Being Taken to Contain and Stop Spill

PART 9

CLOSURES ON VESSELS

Upon completion of cargo transfer operations, all tank hatch covers, ullage covers, and gauging device covers shall be dogged down and secured. In addition, the vent drain valves, if installed, should be secured and left in the proper position. All drain valves should be closed, and drip pan covers, if installed, should be made up tight. Covers for void spaces, bow and stern compartments shall be secured at all times and checked for tightness. Closing devices on clean-out hatches and clean-out opening should be checked, especially when the barge is loaded.

PART 10

PRODUCT DATA

See specific MSDS sheets provided with these procedures.

In case of any other emergency, immediately shut down and notify the transferring facility, and Chem Carriers L.L.C. (225) 642-0060 24 Hour Line.

PART 11

VAPOR CONTROL PROCEDURES

This is a guide only and is not intended to replace experience, sound judgment, and a proper assessment of the task at hand.

The tankerman on duty is the acting Designated Person In Charge (PIC) and is responsible for cargo transfer operations and carrying out related operations on barges.

1. Vapor Recovery Transfer Maximum Rate is 2300 BBLS/HR for

- subchapter "D" Cargoes and 2400 BBBLS/Hr for subchapter "O" Cargoes.
- 1.1 Transfer rates, which exceed these maximums, must be approved by Chem Carriers.
- 1.2 Transfer rates for each cargo tank should not exceed the maximum transfer rate.

2. Pre-transfer Inspection For Vapor Recovery Operations

- 2.1 Follow the procedures outlined below in addition to the procedures utilized during normal transfers:
- 2.1.1 Wear personal protective equipment (PPE) as needed for the cargo in the barge when testing P/V and, hooking up hoses, or draining low points.
- 2.1.2 Ensure that a Certificate of Vapor Tightness is onboard and valid.
- 2.1.3 Close the low point drain on the port/starboard vapor header, if applicable.
- 2.1.4 Close the low point drain near the vent stack, if applicable.
- 2.1.5 Close valve to the vent riser if applicable.
- 2.1.7 Blinds used for the vapor control manifold should have a hole to accommodate the ½" stud located in the vapor header.
- 2.1.8 Each cargo tank is fitted with a liquid level gauge stick. Remove the cap, raise the stick, This stick can be monitored visually to avoid overfilling.
- 2.1.9 Ensure that the last one meter (3.3 feet) of vapor piping before the vapor connection is painted red/yellow/red.
- 2.1.10 The cross-header should be stenciled with the word "VAPOR" in black letters at least 2'' high.
- 2.1.11 The vapor connection flange should be fixed with a 1" long by 1/2" diameter stud projecting outward from the face of the flange, midway between bolt holes.
- 2.1.12 The high level alarms/shutdowns are installed near the center of each cargo tank. Dock alarm/shutdown should be connected prior to loading, and plugs located near the forward end of the barge Port and Starboard should be labeled "ALARM/SHUTDOWN SENSOR." High level alarms are set to alarm at 90% of the cargo tanks capacity and Shut downs are set to shut transfer down at 95% of each tanks capacity.
- 2.1.13 Ensure that the P/V relief valve flame screen, if required, is in place and in good condition prior to testing.
- 2.1.14 Ensure that the facility has a Letter of Adequacy endorsed as meeting the requirements of 33 CFR Subpart E.

Vapor Piping

- 3.1 The PIC checks the vapor piping diagram.
- 3.2 Characteristics of a vapor header:
- 3.2.1 The vapor collection piping system on tank barges is permanently installed and located as close as practical to the loading manifold. The piping system is electrically bonded to the hull and electrically continuous.
- 3.2.2 The last one meter (3.3 feet) of vapor piping prior to the valve before the vapor connection is painted red/yellow/red. The red bands are 4" wide and the yellow band is 32" wide.
- 3.2.3 The vapor header is stenciled with the word "VAPOR" in black letters at least 2" high.
- 3.2.4 The vapor connection flange is to be fixed with a 1" by 1/2" diameter stud projecting outward from the face of the flange. This stud is located at the top of the flange, midway between bolt holes.
- 3.2.5 When not in use, blank off the vapor headers using a blind flange with a bolt in every hole. Each blind flange used on the vapor piping has a hole drilled to accommodate the pin.
- 4. Inspection And Verification Of Vent Lines
- 4.1 The Person in Charge performs the following steps:
- 4.1.1 Checks the Certificate of Inspection on board the barge;
- 4.1.2 Locates polymerizing or inhibited cargoes in the section of the COI marked Specific Hazardous Cargo Authority;
- 4.1.3 Refers to the MSDS or Chemical Data Guide on board the vessel to determine what cargoes are subject to polymerization, or what cargoes are inhibited;
- 4.1.4 Locates the MSDS for the cargo and determines its toxicity and whether or not it is a polymerizing or inhibited cargo; and,
- 4.1.5 Notifies the Dispatcher and Field Supervisor when polymerization is suspected.
- 5. Any problems with the Vapor Control system must be reported immediately to the person in charge and Chem Carriers.



Commandant United States Coast Guard 2703 Martin Luther King Jr. Ave SE Stop 7516 Washington, DC 20593-7516 Staff Symbol: CG-MER-4 (VRP) Phone: (202) 372-1005 Fax: (202) 372-8376 Email: vrp@uscg.mil

16460 March 12, 2025

Chem Carriers, L.L.C. C/O: FOREFRONT EMERGENCY MANAGEMENT, LP ATTN: ALLIE MARTIN 1730 COTEAU ROAD HOUMA, LA 70364

Dear Sir or Madam:

Your Vessel Response Plan (Control Number 56041), submitted to meet the requirements of Title 33, Code of Federal Regulations (CFR), Part 155, Subparts D and I, is **approved**. Approval will remain valid until **March 21, 2030**.

The CCL 29 (1212829) is authorized to operate only in the ports or geographic areas indicated in the Captain of the Port zones listed below. If carrying oil as cargo, the vessel is prohibited from handling, storing, transporting, transferring, or lightering oil unless it is operating in full compliance with this plan. Compliance includes ensuring that required resources have been identified and planned for or are in place and available through contract or other approved means. If applicable to your routes, this includes the dispersant and aerial observation requirements of 33 CFR 155.1050.

You are reminded that your chosen salvage and marine firefighting resource provider may have submitted waivers from meeting one or more of the specified response times in accordance with 33 CFR 155.4055. If so, this may be rescinded by the U.S. Coast Guard if the appropriate response resources are not available when the approved waiver expires. You shall continue to assess the adequacy of your chosen salvors and firefighters as required by 33 CFR 155.4050.

The vessel must keep a copy of this approval letter onboard in addition to the minimum sections of the plan as required by 33 CFR 155.1030. In accordance with 33 CFR 155.1070, you are required to review your plan annually and submit plan amendments for approval. As per 33 CFR 155.1070(b), the entire plan must be resubmitted for a comprehensive review and approval six (6) months prior to the expiration date.

APPROVED CAPTAIN OF THE PORT ZONES

CORPUS CHRISTI HOUMA HOUSTON-GALVESTON LOWER MISSISSIPPI RIVER OHIO VALLEY

UPPER MISSISSIPPI RIVER

(MEMPHIS) PORT ARTHUR AND LAKE (ST. LOUIS)

MOBILE CHARLES

NEW ORLEANS

Sincerely,

CHARRON MCCOMBS

Lieutenant Commander

Acting Chief, Domestic Preparedness & Planning Division

U.S. Coast Guard

By direction



Commanding Officer United States Coast Guard Marine Safety Center US Coast Guard Stop 7430 2703 Martin Luther King Jr. Ave. SE Washington, DC 20593-7430 Staff Symbol: MSC-5 Phone: (202) 795-6729 Email: securityplaninfo@uscq.mil

16710 VS-326893 December 3, 2024

Chem Carriers, LLC Attn: Robert Banta 1237 Hwy 75 Sunshine, LA 70780 robert@chemcarriers.com

Subj: CHEM CARRIERS, LLC VESSELS

VESSEL SECURITY PLAN APPROVAL WITH AMENDMENTS

Ref: (a) Your correspondence dated November 6, 2024

(b) Title 33 Code of Federal Regulations (CFR) Part 104

(c) MSC Vessel Security Plan Approval letter dated October 16, 2024

Dear Mr. Banta:

We have conducted a review of the Vessel Security Plan (VSP) submitted with reference (a) in accordance with reference (b) and it is "**Approved**."

Your vessel must operate in compliance with this approved VSP and the requirements contained in reference (b). You are reminded to immediately report any deviation from this approved plan to the local Captain of the Port (COTP)/Officer in Charge, Marine Inspection (OCMI).

This approval will remain valid until five years from the date of reference (c) unless rescinded in writing by the local COTP/OCMI. You must review your plan annually and submit any amendments to this office for approval. Please ensure that a copy of the VSP is maintained on board the vessel if manned, or, if unmanned, at a suitable secure location so that it is readily available during an emergency or security incident. You shall make available to the Coast Guard, upon request, this letter, the VSP and any information related to the implementation of the VSP. Our Case Number for this plan is 326893. Please ensure that all future correspondence includes this Case Number.

Sincerely,

K. C. WILLIAMS Lieutenant Commander, U.S. Coast Guard Chief, Vessel Security Division By direction

Enclosures: (1) List of Vessel Security Plan Amendments

(2) List of Vessels Covered

List of Vessels Covered

Vessel Name	Official Number (O.N.)
CCL-1	518612
CCL 2	510107
CCL-3	296363
CCL 4	512519
CCL-5	512520
CCL-6	530996
CCL7	551980
CCL 8	551982
CCL 9	551983
CCL 10	551979
CCL 11	551976
CCL 11	1164451
CCL 14 CCL 15	1164452
CCL 13 CCL 16	1164666
CCL 16 CCL 17	
	1166179
CCL 18	1168981
CCL 19	1168980
CCL 20	1191598
CCL 21	1191599
CCL 22	1191600
CCL 23	1191601
CCL 24	1196547
CCL 25	1196548
CCL 26	1203816
CCL 27	1203817
CCL 28	1212828
CCL 29	1212829
CCL 30	1305871
CCL 31	1305870
CCL 32	1305869
CCL 33	1305868
CCL 401	1216671
CCL 402	1219910
CCL 403	1231311
CCL 404	1231312
CCL 405	1236867
CCL 406	1236866
CCL 407	1246320
CCL 408	1246097
CCL 409	1246098
CCL 410	1255906
CCL 411	1255907
CCL 414-L	1262941
CCL 415-T	1262942
-	-

Enclosure 2, page 2 of 2, to MSC letter VS-326893 of December 3, 2024

Vessel Name	Official Number (O.N.)
CCL 416-T	1264691
CCL 417 T	1298307
CCL 418-L	1306896
CCL 419-L	1306897
CCL 420-T	1348560
CCL 421-T	CG1843359
CCL 3202	1089031
HFL 413	1237482
HFL 415	1237483
HFL 435	1236563
HFL 605	1237484



BARGE "CCL 29" HULL NO. C&C Marine # 094

TANK NO. 1 INNAGE TABLE

CAPACITIES GIVEN IN BARRELS OF 42 U.S. GALLONS	
--	--


	APACITIES GIVEN IN BARRELS OF 42 U.S. GALLONS GAU														OAHOE HE	OUT.	401.011														
CAPACI		IN BAR		1	THE RESERVE THE PARTY OF THE PA			-		1				1 1						T T	40 899	1	AA Prop	Tax	40 FT	T T	40 FT	I I	GAUGE HEI	-	16' 3"
IN	0 FT.	IN	1 FT.	IN	2 FT.	IN	3 FT.	IN	4 FT.	IN	5 FT.	IN	6 FT.	IN	7 FT.	IN	8 FT.	IN	9 FT.	IN	10 FT.	IN	11 FT.	IN	12 FT.	IN	13 FT.	IN	14 FT.	IN	15 FT.
0	0.56	0	236.62	0	480.90	0	724.56	0	968.56	0	1,212.73	0	1,456.92	0	1,701.10	0	1,945.35	0	2,189.67	0	2,433.98	0	2,658.49	0	2,872.00	0	3,085.50	0	3,299.01	0	3,502.37
1/4	4.94	1/4	241.70	1/4	485.99	1/4	729.63	1/4	973.65	1/4	1,217.82	1/4	1,462.00	1/4	1,706.19	1/4	1,950.44	1/4	2,194.76	1/4	2,439.06	1/4	2,662.93	1/4	2,876.44	1/4	3,089.95	1/4	3,303.46	1/4	3,504.53
1/2	9.31	1/2	246.79	1/2	491.08	1/2	734.70	1/2	978.73	1/2	1,222.90	1/2	1,467.09	1/2	1,711.28	1/2	1,955.53	1/2	2,199.85	1/2	2,444.15	1/2	2,667.38	1/2	2,880.89	1/2	3,094.40	1/2	3,307.91	1/2	3,506.69
3/4	13.69	3/4	251.88	3/4	496.17	3/4	739.77	3/4	983.82	3/4	1,227.99	3/4	1,472.18	3/4	1,716.36	3/4	1,960.62	3/4	2,204.94	3/4	2,449.24	3/4	2,671.83	3/4	2,885.34	3/4	3,098.85	3/4	3,312.36	3/4	3,508.85
1	18.06	1	256.97	1	501.26	1	744.84	1	988.90	1	1,233.08	1	1,477.26	1	1,721.45	1	1,965.71	1	2,210.03	1	2,454.33	1	2,676.28	1	2,889.79	1/4	3,103.30	1./4	3,316.81	1/4	3,510.12
1/4	22.60	1/4	262.06	1/4	506.35	1/4	749.91	1/4	993.99	1/4	1,238.17	1/4		1/4	1,726.54	1/4	1,970.80	1/4	2,215.12	1/4	2,459.42	1/4	2,680.73	1/4	2,894.24	1/4	3,107.74	1/4	3,321.25	-	3,511.39
1/2	27.13	1/2	267.15	1/2	511.43	1/2	754.98	1/2	999.07	1/2	1,243.25	1/2	1,487.44	1/2	1,731.62	1/2	1,975.89	1/2	2,220.21	1/2	2,464.50	1/2	2,685.18	1/2	2,898.68	1/2	3,112.19	1/2	3,325.70		3,512.66
3/4	31.66	3/4	272.24	3/4	516.52	3/4	760.05	3/4	1,004.16	3/4	1,248.34	3/4	1,492.53	3/4	1,736.71	3/4	1,980.98	3/4	2,225.30	3/4	2,469.59	3/4	2,689.62	3/4	2,903.13	3/4	3,116.64	3/4	3,330.15		3,513.93
2	36.19	2	277.33	2	521.61	2	765.12	2	1,009.24	2	1,253.43	2	1,497.61	2	1,741.80	2	1,986.07	2	2,230.39	2	2,474.62	2	2,694.07	2	2,907.58	2	3,121.09	2	3,334.60	2	
1/4	40.88	1/4	282.42	1/4	526.70	1/4	770.21	1/4	1,014.33	1/4	1,258.52	1/4	1,502.70	1/4	1,746.89	1/4	1,991.16	1/4	2,235.48	1/4	2,479.64	1/4	2,698.52	1/4	2,912.03	1/4	3,125.54	1/4	3,339.05	1/4	
1/2	45.57	1/2	287.51	1/2	531.78	1/2	775.29	1/2	1,019.42	1/2	1,263.60	1/2	1,507.79	1/2	1,751.97	1/2	1,996.25	1/2	2,240.57	1/2	2,484.66	1/2	2,702.97	1/2	2,916.48	1/2	3,129.99	1/2	3,343.49	1/2	
3/4	50.25	3/4	292.59	3/4	536.87	3/4	780.38	3/4	1,024.50	3/4	1,268.69	3/4	1,512.88	3/4	1,757.06	3/4	2,001.34	3/4	2,245.66	3/4	2,489.69	3/4	2,707.42	3/4	2,920.92	3/4	3,134.43	3/4	3,347.94	3/4	
3	54.94	3	297.68	3	541.95	3	785.47	3	1,029.59	3	1,273.78	3	1,517.96	3	1,762.15	3	2,006.43	3	2,250.75	3	2,494.58	3	2,711.86	3	2,925.37	3	3,138.88	3	3,352.39	3	
1/4	59.77	1/4	302.77	1/4	547.04	1/4	790.55	1/4	1,034.68	1/4	1,278.86	1/4	1,523.05	1/4	1,767.24	1/4	2,011.52	1/4	2,255.84	1/4	2,499.48	1/4	2,716.31	1/4	2,929.82	1/4	3,143.33	1/4	3,356.84	1/4	
1/2	64.60	1/2	307.86	1/2	552.13	1/2	795.64	1/2	1,039.77	1/2	1,283.95	1/2	1,528.14	1/2	1,772.32	1/2	2,016.61	1/2	2,260.93	1/2	2,504.37	1/2	2,720.76	1/2	2,934.27	1/2	3,147.78	1/2	3,361.29	1/2	
3/4	69.42	3/4	312.95	3/4	557.21	3/4	800.72	3/4	1,044.85	3/4	1,289.04	3/4	1,533.22	3/4	1,777.41	3/4	2,021.70	3/4	2,266.02	3/4	2,509.27	3/4	2,725.21	3/4	2,938.72	3/4	3,152.23	3/4	3,365.73	3/4	
4	74.25	4	318.04	4	562.30	4	805.81	4	1,049.94	4	1,294.13	4	1,538.31	4	1,782.50	4	2,026.79	4	2,271.11	4	2,514.04	4	2,729.66	4	2,943.17	4	3,156.67	4	3,370.18	4	1
1/4	79.22	1/4	323.13	1/4	567.37	1/4	810.90	1/4	1,055.03	1/4	1,299.21	1/4	1,543.40	1/4	1,787.58	1/4	2,031.88	1/4	2,276.20	1/4	2,518.80	1/4	2,734.10	1/4	2,947.61	1/4	3,161.12	1/4	3,374.63	1/4	
1/2	84.19	1/2	328.22	1/2	572.44	1/2	815.98	1/2	1,060.11	1/2	1,304.30	1/2	1,548.49	1/2	1,792.67	1/2	2,036.97	1/2	2,281.29	1/2	2,523.57	1/2	2,738.55	1/2	2,952.06	1/2	3,165.57	1/2	3,379.08	1/2	
3/4	89.15	3/4	333.31	3/4	577.51	3/4	821.07	3/4	1,065.20	3/4	1,309.39	3/4	1,553.57	3/4	1,797.76	3/4	2,042.06	3/4	2,286.38	3/4	2,528.34	3/4	2,743.00	3/4	2,956.51	3/4	3,170.02	3/4	3,383.53	3/4	
5	94.12	5	338.40	5	582.58	5	826.16	5	1,070.29	5	1,314.47	5	1,558.66	5	1,802.85	5	2,047.15	5	2,291.47	5	2,532.98	5	2,747.45	5	2,960.96	5	3,174.47	5	3,387.98	5	
1/4	99.21	1/4	343.48	1/4	587.65	1/4	831.24	1/4	1,075.38	1/4	1,319.56	1/4	1,563.75	1/4	1,807.93	1/4	2,052.24	1/4	2,296.56	1/4	2,537.62	1/4	2,751.90	1/4	2,965.41	1/4	3,178.91	1/4	3,392.42	1/4	
1/2	104.30	1/2	348.57	1/2	592.72	1/2	836.33	1/2	1,080.46	1/2	1,324.65	1/2	1,568.83	1/2	1,813.02	1/2	2,057.33	1/2	2,301.65	1/2	2,542.26	1/2	2,756.34	1/2	2,969.85	1/2	3,183.36	1/2	3,396.87	1/2	1
3/4	109.39	3/4	353.66	3/4	597.79	3/4	841.41	3/4	1,085.55	3/4	1,329.74	3/4	1,573.92	3/4	1,818.11	3/4	2,062.42	3/4	2,306.74	3/4	2,546.90	3/4	2,760.79	3/4	2,974.30	3/4	3,187.81	3/4	3,401.32	3/4	
6	114.48	6	358.75	6	602.86	6	846.50	6	1,090.64	6	1,334.82	6	1,579.01	6	1,823.19	6	2,067.51	6	2,311.83	6	2,551.44	6	2,765.24	6	2,978.75	6	3,192.26	6	3,405.77	6	
1/4	119.57	1/4	363.84	1/4	607.93	1/4	851.59	1/4	1,095.72	1/4	1,339.91	1/4	1,584.10	1/4	1,828.28	1/4	2,072.60	1/4	2,316.92	1/4	2,555.99	1/4	2,769.69	1/4	2,983.20	1/4	3,196.71	1/4	3,410.22	1/4	
1/2	124.66	1/2	368.93	1/2	613.00	1/2	856.67	1/2	1,100.81	1/2	1,345.00	1/2	1,589.18	1/2	1,833.37	1/2	2,077.69	1/2	2,322.01	1/2	2,560.53	1/2	2,774.14	1/2	2,987.65	1/2	3,201.15	1/2	3,414.66	1/2	
3/4	129.75	3/4	374.02	3/4	618.07	3/4	861.76	3/4	1,105.90	3/4	1,350.08	3/4	1,594.27	3/4	1,838.46	3/4	2,082.78	3/4	2,327.10	3/4	2,565.08	3/4	2,778.59	3/4	2,992.09	3/4	3,205.60	3/4	3,419.11	3/4	
7	134.84	7	379.11	7	623.14	7	866.84	7	1,110.99	7	1,355.17	7	1,599.36	7	1,843.55	7	2,087.87	7	2,332.19	7	2,569.52	7	2,783.03	7	2,996.54	7	3,210.05	7	3,423.56	7	
1/4	139.92	1/4	384.20	1/4	628.21	1/4	871.93	1/4	1,116.07	1/4	1,360.26	1/4	1,604.44	1/4	1,848.64	1/4	2,092.96	1/4	2,337.28	1/4	2,573.97	1/4	2,787.48	1/4	3,000.99	1/4	3,214.50	1/4	3,428.01	1/4	1
1/2	145.01	1/2	389.29	1/2	633.29	1/2	877.02	1/2	1,121.16	1/2	1,365.35	1/2	1,609.53	1/2	1,853.73	1/2	2,098.05	1/2	2,342.37	1/2	2,578.42	1/2	2,791.93	1/2	3,005.44	1/2	3,218.95	1/2	3,432.46	1/2	
3/4	150.10	3/4	394.39	3/4	638.36	3/4	882.10	3/4	1,126.25	3/4	1,370.43	3/4	1,614.62	3/4	1,858.82	3/4	2,103.14	3/4	2,347.46	3/4	2,582.87	3/4	2,796.38	3/4	3,009.89	3/4	3,223.40	3/4	3,436.90	3/4	
8	155.19	8	399.48	8	643.43	8	887.19	8	1,131.34	8	1,375.52	8	1,619.71	8	1,863.91	8	2,108.23	8	2,352.55	8	2,587.32	8	2,800.83	8	3,014.33	8	3,227.84	8	3,441.35	8	
1/4	160.28	1/4	404.57	1/4	648.50	1/4	892.28	-	1,136.42	1/4	1,380.61	1/4	1,624.79	1/4	1,869.00	1/4	2,113.32	1/4	2,357.64	1/4	2,591.77	1/4	2,805.27	1/4	3,018.78	1/4	3,232.29	1/4	3,445.80	1/4	
1/2	165.37	1/2	409.66	1/2	653.57	1/2	897.36	-	1,141.51	1/2	1,385.70	1/2	1,629.88	1/2	1,874.09	1/2	2,118.41	1/2	2,362.73	1/2	2,596.21	1/2	2,809.72	1/2	3,023.23	1/2	3,236.74	1/2	3,450.25	1/2	
3/4	170.46	3/4	414.75	3/4	658.64	3/4	902.45	3/4	1,146.60	3/4	1,390.78	3/4	1,634.97	3/4	1,879.18	3/4	2,123.50	3/4	2,367.82	3/4	2,600.66	3/4	2,814.17	3/4	3,027.68	3/4	3,241.19	3/4	3,454.70	3/4	
	175.55	9	419.84	9	663.71	9	907.53	_	1,151.68	9	1,395.87	9	1,640.06	9	1,884.27	9	2,128.59	9	2,372.91	9	2,605.11	9	2,818.62	9	3,032.13	9	3,245.64	9	3,459.08	9	
1/4	180.64	1/4	424.93	1/4	668.78	1/4	912.62	1/4	1,156.77	1/4	1,400.96	1/4	1,645.14	1/4	1,889.36	1/4	2,133.68	1/4	2,378.00	1/4	2,609.56	1/4	2,823.07	1/4	3,036.58	1/4	3,250.08	1/4	3,463.47	1/4	
1/2	185.73	1/2	430.02	1/2	673.85	1/2	917.71	1/2	1,161.86	1/2	1,406.04	1/2	1,650.23	1/2	1,894.45	1/2	2,138.77	1/2	2,383.09	1/2	2,614.01	1/2	2,827.51	1/2	3,041.02	1/2	3,254.53	1/2	3,467.86	1/2	
3/4	190.81	3/4	435.11	3/4	678.92	3/4	922.79	3/4	1,166.95	3/4	1,411.13	3/4	1,655.32	3/4	1,899.54	3/4	2,143.86	3/4	2,388.18	3/4	2,618.45	3/4	2,831.96	3/4	3,045.47	3/4	3,258.98	3/4	3,472.24	3/4	
10	195.90	10	440.20	10	683.99	10	927.88	10	1,172.03	10	1,416.22	10	1,660.40	10	1,904.63	10	2,148.95	10	2,393.27	10	2,622.90	10	2,836.41	10	3,049.92	10	3,263.43	10	3,476.18	10	
1/4	200.99	1/4	445.28	1/4	689.06	1/4	932.96	1/4	1,177.12	1/4	1,421.31	1/4	1,665.49	1/4	1,909.72	1/4	2,154.04	1/4	2,398.36	1/4	2,627.35	1/4	2,840.86	1/4	3,054.37	1/4	3,267.88	1/4	3,480.13	1/4	
1/2	206.08	1/2	450.37	1/2	694.13	1/2	938.05	1/2	1,182.21	1/2	1,426.39	1/2	1,670.58	1/2	1,914.81	1/2	2,159.13	1/2	2,403.45	1/2	2,631.80	1/2	2,845.31	1/2	3,058.82	1/2	3,272.32	1/2	3,484.07	1/2	
3/4	211.17	3/4	455.46	3/4	699.20	3/4	943.13	3/4	1,187.29	3/4	1,431.48	3/4	1,675.67	3/4	1,919.90	3/4	2,164.22	3/4	2,408.54	3/4	2,636.25	3/4	2,849.75	3/4	3,063.26	3/4	3,276.77	3/4	3,488.01	3/4	
11	216.26	11	460.55	11	704.27	11	948.22	11	1,192.38	11	1,436.57	11	1,680.75	11	1,924.99	11	2,169.31	11	2,413.63	11	2,640.69	11	2,854.20	11	3,067.71	11	3,281.22	11	3,491.06	11	
1/4	221.35	1/4	465.64	1/4	709.34	1/4	953.31	1/4	1,197.47	1/4	1,441.65	1/4	1,685.84	1/4	1,930.08	1/4	2,174.40	1/4	2,418.71	1/4	2,645.14	1/4	2,858.65	1/4	3,072.16	1/4	3,285.67	1/4	3,494.11	1/4	
1/2	226.44	1/2	470.73	1/2	714.41	1/2	958.39	1/2	1,202.56	1/2	1,446.74	1/2	1,690.93	1/2	1,935.17	1/2	2,179.49	1/2	2,423.80	1/2	2,649.59	1/2	2,863.10	1/2	3,076.61	1/2	3,290.12	1/2	3,497.16	1/2	
3/4	231.53	3/4	475.81	3/4	719.49	3/4	963.48	3/4	1,207.64	3/4	1,451.83	3/4	1,696.01	3/4	1,940.26	3/4	2,184.58	3/4	2,428.89	3/4	2,654.04	3/4	2,867.55	3/4	3,081.06	3/4	3,294.56	3/4	3,500.21	3/4	ED DDETT

NOTE: CAPACITY TABLE APPLIES ONLY TO MANUAL INNAGES TAKEN AT THE TOP LIP OF MMC VALVE.

NOTE: GAUGE POINT LOCATED IN GEOMETRIC CENTER OF TANK

NOTE: FOR GREATER ACCURACY, BARGE SHOULD BE UPRIGHT AND ON EVEN KEEL

DATE STRAPPED 7/15/08 BY: JLF DATE COMPUTED: 7/28/08 BY: WHF DATE ISSUED: 7/29/08





BARGE "CCL 29" HULL NO. C&C Marine # 094

TANK NO. 2 INNAGE TABLE

GAUGE HEIGHT: 16' 3" CAPACITIES GIVEN IN BARRELS OF 42 U.S. GALLONS 15 FT. 0 FT. 1 FT. IN 2 FT. IN 3 FT. IN 4 FT. IN 5 FT. IN 6 FT. IN 7 FT. IN 8 FT. IN 9 FT. IN 10 FT. IN 11 FT. IN 12 FT. IN 13 FT. IN 14 FT. IN 2,207.46 0 0 3,588.68 3,864.93 4,125.14 274.75 0 551.03 0 826.53 0 1,378.72 0 1,654.97 0 1,931.21 0 0 2,483.70 0 2,759.95 0 3,036.19 3,312.44 0 0.56 0 0 1,102.50 1/4 1/4 1/4 3,041.95 1/4 3,318.19 1/4 3,594.44 1/4 3,870.68 1/4 4,127.23 1/4 6.11 1/4 280.51 1/4 556.78 1/4 832.27 1/4 1,108.26 1/4 1,384.48 1/4 1,660.72 1/4 1,936.97 1/4 2,213.21 2,489.46 2,765.70 2,771.46 1/2 1/2 3,323.95 1/2 3,600.19 1/2 3,876.44 1/2 4,129.31 1/2 1/2 286.26 1/2 562.54 838.00 1,666.48 1/2 2,218.97 1/2 2,495.21 1/2 3,047.70 11.66 1/2 1/2 1,114.01 1/2 1,390.23 1/2 1,942.72 1/2 4,131,40 3,329.70 3/4 3,605.95 3/4 3,882.19 3/4 3/4 17.22 3/4 292.02 3/4 568.29 3/4 843.73 3/4 1,119.76 3/4 1,395.99 3/4 1,672.23 3/4 1,948.48 3/4 2,224.72 3/4 2,500.97 3/4 2,777.21 3/4 3,053.46 3/4 22.77 297.77 574.05 849.46 2,230.48 2,506.72 2,782.97 1 3,059.21 1 3,335.46 1 3,611.70 1 3,887.95 4,132.04 1 1 1 1 1 1,125.51 1 1,401.74 1 1,677.99 1 1,954.23 1 1 1 1/4 1/4 3,893.70 1/4 4,132.69 1/4 28.38 1/4 303.53 1/4 579.80 1/4 855.20 1/4 1/4 1,407.50 1/4 1,683,74 1/4 1,959,99 2,236.23 1/4 2,512,48 1/4 2,788.72 1/4 3,064.97 1/4 3,341.21 3,617.46 1,131.26 3,346.97 1/2 3,623.21 1/2 3,899.46 1/2 4,133.33 1/2 33.98 1/2 309.28 1/2 585.56 1/2 860.93 1/2 1,137.02 1/2 1,413.25 1/2 1,689.50 1/2 1,965.74 1/2 2,241.99 1/2 2,518.23 1/2 2,794.48 1/2 3,070.72 1/2 3/4 3/4 2,523.99 2,800.23 3/4 3,076.48 3/4 3,352.72 3/4 3,628.97 3/4 3,905.21 3/4 4,133.98 3/4 315.04 3/4 3/4 1,695.25 3/4 1.971.50 2,247.74 3/4 39.59 591.31 3/4 866.66 3/4 1.142.77 1,419.01 3/4 3/4 2,529.74 2 45.20 2 320.80 2 597.07 2 872.40 2 1,148.52 2 1,424.76 2 1,701.01 2 1,977.25 2 2,253.50 2 2 2,805.99 2 3,082.23 2 3,358.48 2 3,634.72 3,910.97 1/4 1/4 1/4 1/4 1/4 1/4 1/4 2,259.25 1/4 2,535.50 1/4 2,811.74 1/4 3,087.99 1/4 3,364.23 1/4 3,640.48 1/4 3,916.72 1/4 50.86 326.55 602.82 878.15 1,154.28 1,430.52 1/4 1,706.76 1,983.01 1/4 1/2 2,265.01 1/2 1/2 3,369.99 1/2 3,646.23 1/2 3,922.48 1/2 1/2 332.31 1/2 608.57 1/2 883.90 1/2 1/2 1/2 1/2 1,988.76 1/2 1/2 2,541.25 1/2 2,817.50 3,093.74 56.53 1,160.03 1,436.27 1,712.52 3/4 1,718.27 3/4 3/4 3,375,74 3/4 3,651.99 3/4 3,928.23 3/4 62.19 3/4 338.06 3/4 614.32 3/4 889.65 3/4 1,165.79 3/4 1,442.03 3/4 3/4 1,994.52 3/4 2,270.76 3/4 2,547.01 2,823.25 3/4 3,099.50 2,829.01 3,381.50 3 3,657.74 3 3,933.99 3 3 3 3,105.25 3 67.85 343.82 3 620.08 3 895.41 3 1,171.54 3 1,447.79 3 1,724.03 2,000.27 3 2,276.52 3 2,552.76 3 1/4 1,177.30 1/4 3,111.01 3,387.25 1/4 3,663.50 1/4 3,939.74 1/4 73.55 1/4 349.57 1/4 625.83 1/4 901.16 1/4 1,453.54 1/4 1,729.79 2,006.03 1/4 2,282.27 1/4 2,558.52 1/4 2,834.76 1/4 1/2 79.25 1/2 355.33 1/2 631.58 1/2 906.91 1/2 1,183.05 1/2 1,459.30 1/2 1,735.54 1/2 2,011.78 2,288.03 1/2 2,564.27 1/2 2,840.52 1/2 3,116.76 1/2 3,393.01 1/2 3,669.25 1/2 3,945.50 1/2 1/2 3.398.76 3/4 3,675.01 3/4 3,951.25 3/4 3/4 84.95 3/4 361.08 3/4 637.33 3/4 3/4 3/4 1,465.05 2.017.54 2,293,78 3/4 2,570.03 3/4 2,846.27 3/4 3.122.52 3/4 912.67 1.188.81 3/4 1.741.30 3/4 4 90.65 4 366.84 4 643.09 4 918.42 4 1,194.56 4 1,470.81 1,747.05 4 2,023.30 4 2,299.54 4 2,575.78 4 2,852.03 4 3,128.27 4 3,404.52 4 3,680.76 4 3,957.01 4 1/4 1/4 1/4 3,410.27 1/4 3,686.52 1/4 3,962.76 1/4 96.39 1/4 372.59 1/4 648.82 1/4 924.17 1/4 1,200.32 1/4 1,476.56 1/4 1,752.81 1/4 2,029.05 2,305.30 1/4 2,581.54 1/4 2,857.78 3,134.03 1/4 1/2 1/2 3,416.03 1/2 3,692.27 1/2 3,968.52 1/2 102.13 1/2 378.35 1/2 654.55 1/2 929.92 1/2 1,206.07 1,482.32 1/2 1,758.56 1/2 2,034.81 2,311.05 1/2 2,587.29 1/2 2,863.54 3,139.78 1/2 1/2 1/2 3/4 107.87 3/4 384.10 3/4 660.29 3/4 935.68 3/4 3/4 1,488.07 3/4 1,764.32 3/4 2,040,56 2,316.81 3/4 2,593.05 3/4 2,869.29 3/4 3,145.54 3/4 3,421.78 3/4 3,698.03 3/4 3,974.27 3/4 1.211.83 3/4 3,980.03 5 5 113.61 5 389.86 5 666.02 5 941.43 5 1,217.58 5 1,493.83 5 1,770.07 5 2,046.32 5 2,322.56 5 2,598.81 5 2,875.05 5 3,151.29 5 3,427.54 5 3,703.78 1/4 1/4 1/4 2,880.80 1/4 3,157.05 1/4 3,433.29 1/4 3,709.54 1/4 3,985.78 1/4 1/4 119.36 1/4 395.61 671.75 1/4 947.18 1/4 1,223.34 1/4 1,499.58 1/4 1,775.83 1/4 2,052.07 1/4 2,328.32 2,604.56 1/2 3,439.05 1/2 3,715.29 1/2 3,991.54 1/2 1/2 125.12 1/2 401.37 1/2 677.48 1/2 952.94 1/2 1,229.09 1/2 1,505.34 1/2 1,781.58 1/2 2,057.83 2,334.07 1/2 2,610.32 1/2 2,886.56 1/2 3,162.80 3/4 2,892.32 3/4 3,168.56 3/4 3,444.80 3/4 3,721.05 3,997.29 3/4 3/4 130.87 3/4 407.12 3/4 683.22 3/4 958.69 3/4 1,234.85 3/4 1,511.09 3/4 1,787.34 3/4 2,063.58 2,339.83 3/4 2,616.07 6 2,621.83 6 2,898.07 6 3,174.32 6 3,450.56 6 3,726.80 4,003.05 136.63 6 412.88 6 688.95 6 964,44 6 1,240.60 6 1,516.85 6 1,793.09 6 2,069.34 6 2,345.58 6 1/4 1/4 1/4 142.38 1/4 418.63 1/4 694.68 1/4 970.19 1/4 1,246.36 1/4 1,522.60 1/4 1,798.85 1/4 2,075.09 1/4 2,351.34 1/4 2,627.58 1/4 2,903.83 1/4 3,180.07 1/4 3,456.31 3,732.56 4,008.80 1/2 2,909.58 1/2 3,185.83 1/2 3,462.07 1/2 3,738.31 1/2 4,014.56 1/2 148.14 1/2 424.39 1/2 700.41 1/2 975.95 1/2 1,252.11 1/2 1,528.36 1/2 1,804.60 1/2 2,080.85 1/2 2,357.09 1/2 2,633.34 1/2 3/4 3,191.58 3/4 3,467.83 3/4 3,744.07 3/4 4,020.31 3/4 3/4 153.90 3/4 430.15 3/4 3/4 981.70 3/4 1.257.87 3/4 1,534.11 3/4 1.810.36 3/4 2,086.60 2,362.85 3/4 2,639.09 3/4 2,915.34 706.15 3/4 7 3,473.58 7 3,749.83 7 159.65 7 435.90 7 711.88 7 987.45 7 1,263.62 1,539.87 1,816.11 7 2,092.36 7 2,368.60 2,644.85 7 2,921.09 7 3,197.34 4,026.07 7 1/4 1/4 1/4 1/4 1/4 1/4 2,650.60 1/4 2,926.85 1/4 3,203.09 1/4 3,479.34 1/4 3,755.58 1/4 4,031.82 1/4 165.41 441.66 1/4 717.61 1/4 993.21 1,269.38 1,545.62 1/4 1,821.87 1/4 2,098.11 2,374.36 1/2 1/2 1/2 1/2 1/2 1/2 2,932.60 1/2 3,208.85 1/2 3,485.09 1/2 3,761.34 1/2 4,037.58 1/2 171.16 1/2 447.42 1/2 723.34 1/2 998.96 1,275.13 1,551.38 1/2 1,827.62 1/2 2,103.87 2,380.11 2,656.36 3/4 3/4 3/4 3/4 3/4 2,938.36 3/4 3,214.60 3/4 3,490.85 3,767.09 4,043.34 3/4 3/4 176.92 3/4 453.17 3/4 729.08 3/4 1,004.71 1,280.89 3/4 1,557.13 3/4 1,833.38 3/4 2,109.62 3/4 2,385.87 2,662.11 1,839.13 2,115.38 3,496,60 8 3,772.85 4,049.09 182.67 458.93 2,391.62 2,667.87 2,944.11 3,220.36 8 8 8 8 8 734.81 8 1,010.46 8 1,286.64 1,562.89 8 8 3,502.36 3,778.60 1/4 4,054.85 1/4 1/4 188.43 1/4 464.69 1/4 740.54 1/4 1,016.22 1/4 1,292.40 1/4 1,568.64 1/4 1,844.89 1/4 2,121.13 1/4 2,397.38 2,673.62 1/4 2,949.87 1/4 3,226.11 1/4 2,955.62 1/2 3,784.36 4,060.60 1/2 1/2 194.18 1/2 470.44 1/2 746.28 1/2 1,021.97 1/2 1,298.15 1/2 1,574.40 1/2 1,850.64 1/2 2,126.89 1/2 2,403.13 1/2 2,679.38 1/2 1/2 3,231.87 1/2 3,508.11 1/2 3/4 3/4 3/4 3/4 3/4 2.685.13 3/4 2.961.38 3/4 3,237,62 3/4 3,513.87 3/4 3,790.11 3/4 4,066.36 3/4 199.94 476.20 3/4 752.01 1,027.72 3/4 1,303.91 1,580,15 3/4 1,856.40 3/4 2,132.64 2.408.89 2,138.40 3,519.62 9 3,795.87 4,072.04 9 9 205.69 9 481.96 757.74 9 1,033,48 1,309.66 1,585.91 1,862.15 9 2,414.64 9 2,690.89 9 2,967.13 9 3,243.38 9 9 2,144.15 1/4 1/4 3,525.38 1/4 3,801.62 1/4 4,077.73 1/4 1/4 211.45 1/4 487.72 1/4 763.47 1/4 1,039.23 1,315.42 1/4 1,591.66 1/4 1,867.91 1/4 2,420.40 2,696.64 1/4 2,972.89 3,249.13 1/2 1/2 493.47 1/2 1/2 2,426.15 1/2 2,702.40 1/2 2,978.64 1/2 3,254.89 1/2 3,531.13 1/2 3,807.38 4,083.41 1/2 217.20 769.21 1/2 1,044.98 1,321.17 1/2 1,597.42 1,873.66 2,149.91 1/2 3/4 3/4 4,089.10 3/4 222.96 3/4 499.23 3/4 774.94 3/4 1,050.74 3/4 1,326.93 3/4 1,603.17 3/4 1,879.42 3/4 2,155.66 3/4 2,431.91 3/4 2,708.15 3/4 2,984.40 3/4 3,260.64 3,536.89 3,813.13 10 2,990.15 10 3,266.40 10 3,542.64 10 3,818.89 4,094.06 10 10 228.71 10 504.99 10 780.67 10 1,056.49 10 1,332.68 10 1,608.93 10 1,885.17 10 2,161.42 10 2,437.66 10 2,713.91 1/4 1/4 1/4 2,719.66 1/4 2,995.91 1/4 3,272.15 1/4 3,548.40 1/4 3,824.64 1/4 4,099.03 1/4 234.47 1/4 510.74 1/4 786.40 1/4 1,062.24 1,338.44 1/4 1,614.68 1/4 1,890.93 1/4 2,167.17 1/4 2,443.42 1/2 3,277.91 1/2 3,554.15 1/2 3,830.40 1/2 4,103.99 1/2 1/2 240.22 1/2 516.50 1/2 792.14 1/2 1,067.99 1/2 1,344.19 1/2 1,620.44 1/2 1,896.68 1/2 2,172.93 1/2 2,449.17 1/2 2,725.42 1/2 3,001.66 3/4 245.98 3/4 522.25 3/4 797.87 3/4 1,073.74 3/4 3/4 1,626.19 3/4 1,902.44 2,178.68 3/4 2,454.93 3/4 2,731.17 3,007,42 3/4 3,283.66 3/4 3,559.91 3/4 3,836.15 3/4 4,108.96 3/4 1,349.95 3/4 11 251.73 11 528.01 11 803.60 11 1,079.50 11 1,355.70 11 1,631.95 11 1,908.19 11 2,184.44 11 2,460.68 11 2,736.93 11 3,013.17 11 3,289.42 11 3,565.66 11 3,841.91 11 4,112.48 11 1/4 1/4 1/4 1/4 3,018.93 1/4 3,295.17 1/4 3,571.42 1/4 3,847.66 4,116.01 1/4 257.49 1/4 533.76 1/4 809.34 1,085.25 1/4 1,361.46 1/4 1,637.70 1/4 1,913.95 1/4 2,190.19 1/4 2,466.44 1/4 2,742.68 2,472.19 1/2 1/2 1/2 1/2 2,748.44 1/2 3,024.68 1/2 3,300.93 1/2 3,577.17 3,853.42 4,119.53 1/2 1/2 263.24 1/2 539.52 1/2 815.07 1/2 1,091.00 1/2 1,367.21 1/2 1,643.46 1/2 1,919.70 1/2 2,195.95 3/4 3,582.93 3/4 1,096.75 3/4 1,372.97 3/4 1,649.21 3/4 1,925.46 3/4 2,201.70 3/4 2,477.95 3/4 2,754.19 3/4 3,030.44 3/4 3,306.68 3,859.17 3/4 4,123.06 3/4 3/4 269.00 3/4 545.27 820.80

NOTE: CAPACITY TABLE APPLIES ONLY TO MANUAL INNAGES TAKEN AT THE TOP LIP OF MMC VALVE

NOTE: GAUGE POINT LOCATED IN GEOMETRIC CENTER OF TANK

NOTE: FOR GREATER ACCURACY, BARGE SHOULD BE UPRIGHT AND ON EVEN KEEL

INTERTEK CALEB BRETT

DATE STRAPPED 7/15/08BY: JLF
DATE COMPUTED: 7/28/08BY: WHF
DATE ISSUED: 7/29/08



BARGE "CCL 29" HULL NO. C&C Marine # 094

TANK NO. 3 INNAGE TABLE

CAP														GAUGE HE	IGHT:	16' 3"															
IN	0 FT.	IN	1 FT.	IN	2 FT.	IN	3 FT.	IN	4 FT.	IN	5 FT.	IN	6 FT.	IN	7 FT.	IN	8 FT.	IN	9 FT.	IN	10 FT.	IN	11 FT.	IN	12 FT.	IN	13 FT.	IN	14 FT.	IN	15.00
0	0.56	0	246.61	0	494.52	0	741.75	0	989.38	0	1,237.24	0	1,485.12	0	1,733.01	0	1,980.90	0	2,228.78	0	2,476.67	0	2,724.56	0	2,972.44	0	3,220.33	0	3,468.21	0	3,701.72
1/4	5.54	1/4	251.77	1/4	499.69	1/4	746.89	1/4	994.54	1/4	1,242.40	1/4	1,490.29	1/4	1,738.17	1/4	1,986.06	1/4	2,233.95	1/4	2,481.83	1/4	2,729.72	1/4	2,977.61	1/4	3,225.49	1/4	3,473.38	1/4	3,703.59
1/2	10.52	1/2	256.94	1/2	504.85	1/2	752.03	1/2	999.70	1/2	1,247.57	1/2	1,495.45	1/2	1,743.34	1/2	1,991.22	1/2	2,239.11	1/2	2,487.00	1/2	2,734.88	1/2	2,982.77	1/2	3,230.66	1/2	3,478.54	1/2	3,705.46
3/4	15.51	3/4	262.10	3/4	510.02	3/4	757.18	3/4	1,004.86	3/4	1,252.73	3/4	1,500.62	3/4	1,748.50	3/4	1,996.39	3/4	2,244.28	3/4	2,492.16	3/4	2,740.05	3/4	2,987.93	3/4	3,235.82	3/4	3,483.71	3/4	3,707.33
1	20.49	1	267.27	1	515.18	1	762.32	1	1,010.02	1	1,257.89	1	1,505.78	1	1,753.67	1	2,001.55	1	2,249.44	1	2,497.33	1	2,745.21	1	2,993.10	1	3,240.99	1	3,488.87	1	3,707.91
1/4	25.52	1/4	272.43	1/4	520.35	1/4	767.47	1/4	1,015.18	1/4	1,263.06	1/4	1,510.94	1/4	1,758.83	1/4	2,006.72	1/4	2,254.60	1/4	2,502.49	1/4	2,750.38	1/4	2,998.26	1/4	3,246.15	1/4	3,494.04	1/4	3,708.49
1/2	30.55	1/2	277.59	1/2	525.51	1/2	772.61	1/2	1,020.34	1/2	1,268.22	1/2	1,516.11	1/2	1,764.00	1/2	2,011.88	1/2	2,259.77	1/2	2,507.65	1/2	2,755.54	1/2	3,003.43	1/2	3,251.31	1/2	3,499.20	1/2	3,709.06
3/4																3/4	3,504.36	3/4	3,709.64												
		-		-		-		-	1,030.67	2	1,278.55	2	1,526.44	2	1,774.32	2	2,022.21	2	2,270.10	2	2,517.98	2	2,765.87	2	3,013.76	2	3,261.64	2	3,509.53	2	
1/4	45.70	1/4	293.09	1/4	541.00	1/4	788.06	1/4	1,035.83	1/4	1,283.72	1/4	1,531.60	1/4	1,779.49	1/4	2,027.37	1/4	2,275.26	1/4	2,523.15	1/4	2,771.03	1/4	3,018.92	1/4	3,266.81	1/4	3,514.69	1/4	
1/2	50.78	1/2	298.25	1/2	546.16	1/2	793.22	1/2	1,040.99	1/2	1,288.88	1/2	1,536.77	1/2	1,784.65	1/2	2,032.54	1/2	2,280.43	1/2	2,528.31	1/2	2,776.20	1/2	3,024.08	1/2	3,271.97	1/2	3,519.86	1/2	
3/4	55.86	3/4	303.42	3/4	551.32	3/4	798.39	3/4	1,046.16	3/4	1,294.04	3/4	1,541.93	3/4	1,789.82	3/4	2,037.70	3/4	2,285.59	3/4	2,533.48	3/4	2,781.36	3/4	3,029.25	3/4	3,277.14	3/4	3,525.02	3/4	
3	60.94	3	308.58	3	556.48	3	803.55	3	1,051.32	3	1,299.21	3	1,547.10	3	1,794.98	3	2,042.87	3	2,290.75	3	2,538.64	3	2,786.53	3	3,034.41	3	3,282.30	3	3,530.19	3	
1/4	66.06	1/4	313.74	1/4	561.65	1/4	808.71	1/4	1,056.49	1/4	1,304.37	1/4	1,552.26	1/4	1,800.15	1/4	2,048.03	1/4	2,295.92	1/4	2,543.80	1/4	2,791.69	1/4	3,039.58	1/4	3,287.46	1/4	3,535.35	1/4	- 1
1/2	71.17	1/2	318.91	1/2	566.81	1/2	813.87	1/2	1,061.65	1/2	1,309.54	1/2	1,557.42	1/2	1,805.31	1/2	2,053.20	1/2	2,301.08	1/2	2,548.97	1/2	2,796.86	1/2	3,044.74	1/2	3,292.63	1/2	3,540.51	1/2	- 1
3/4	76.29	3/4	324.07	3/4	571.97	3/4	819.03	3/4	1,066.82	3/4	1,314.70	3/4	1,562.59	3/4	1,810.47	3/4	2,058.36	3/4	2,306.25	3/4	2,554.13	3/4	2,802.02	3/4	3,049.91	3/4	3,297.79	3/4	3,545.68	3/4	
4	81.40	4	329.24	4	577.13	4	824.20	4	1,071.98	4	1,319.87	4	1,567.75	4	1,815.64	4	2,063.53	4	2,311.41	4	2,559.30	4	2,807.18	4	3,055.07	4	3,302.96	4	3,550.84	4	
1/4	86.55	1/4	334.40	1/4	582.28	1/4	829.36	1/4	1,077.14	1/4	1,325.03	1/4	1,572.92	1/4	1,820.80	1/4	2,068.69	1/4	2,316.58	1/4	2,564.46	1/4	2,812.35	1/4	3,060.23	1/4	3,308.12	1/4	3,556.01	1/4	- 1
1/2	91.70	1/2	339.57	1/2	587.42	1/2	834.52	1/2	1,082.31	1/2	1,330.19	1/2	1,578.08	1/2	1,825.97	1/2	2,073.85	1/2	2,321.74	1/2	2,569.63	1/2	2,817.51	1/2	3,065.40	1/2	3,313.29	1/2	3,561.17	1/2	1
3/4	96.85	3/4	344.73	3/4	592.56	3/4	839.68	3/4	1,087.47	3/4	1,335.36	3/4	1,583.25	3/4	1,831.13	3/4	2,079.02	3/4	2,326.90	3/4	2,574.79	3/4	2,822.68	3/4	3,070.56	3/4	3,318.45	3/4	3,566.34	3/4	
5	102.00	5	349.89	5	597.71	5	844.84	5	1,092.64	5	1,340.52	5	1,588.41	5	1,836.30	5	2,084.18	5	2,332.07	5	2,579.96	5	2,827.84	5	3,075.73	5	3,323.61	5	3,571.50	5	
1/4	107.16	1/4	355.06	1/4	602.85	1/4	850.01	1/4	1,097.80	1/4	1,345.69	1/4	1,593.57	1/4	1,841.46	1/4	2,089.35	1/4	2,337.23	1/4	2,585.12	1/4	2,833.01	1/4	3,080.89	1/4	3,328.78	1/4	3,576.66	1/4	
1/2	112.33	1/2	360.22	1/2	608.00	1/2	855.17	1/2	1,102.97	1/2	1,350.85	1/2	1,598.74	1/2	1,846.62	1/2	2,094.51	1/2	2,342.40	1/2	2,590.28	1/2	2,838.17	1/2	3,086.06	1/2	3,333.94	1/2	3,581.83	1/2	
3/4	117.50	3/4	365.39	3/4	613.14	3/4	860.33	3/4	1,108.13	3/4	1,356.02	3/4	1,603.90	3/4	1,851.79	3/4	2,099.68	3/4	2,347.56	3/4	2,595.45	3/4	2,843.33	3/4	3,091.22	3/4	3,339.11	3/4	3,586.99	3/4	
6	122.66	6	370.55	6	618.29	6	865.49	6	1,113.29	6	1,361.18	6	1,609.07	6	1,856.95	6	2,104.84	6	2,352.73	6	2,600.61	6	2,848.50	6	3,096.39	6	3,344.27	6	3,592.16	6	
1/4	127.82	1/4	375.72	1/4	623.43	1/4	870.66	1/4	1,118.46	1/4	1,366.34	1/4	1,614.23	1/4	1,862.12	1/4	2,110.00	1/4	2,357.89	1/4	2,605.78	1/4	2,853.66	1/4	3,101.55	1/4	3,349.44	1/4	3,597.32	1/4	- 1
1/2	132.99	1/2	380.88	1/2	628.57	1/2	875.82	1/2	1,123.62	1/2	1,371.51	1/2	1,619.40	1/2	1,867.28	1/2	2,115.17	1/2	2,363.05	1/2	2,610.94	1/2	2,858.83	1/2	3,106.71	1/2	3,354.60	1/2	3,602.49	1/2	- 1
3/4	138.15	3/4	386.05	3/4	633.72	3/4	880.98	3/4	1,128.79	3/4	1,376.67	3/4	1,624.56	3/4	1,872.45	3/4	2,120.33	3/4	2,368.22	3/4	2,616.11	3/4	2,863.99	3/4	3,111.88	3/4	3,359.76	3/4	3,607.65	3/4	
7	143.32	7	391.22	7	638.86	7	886.14	7	1,133.95	7	1,381.84	7	1,629.72	7	1,877.61	7	2,125.50	7	2,373.38	7	2,621.27	7	2,869.16	7	3,117.04	7	3,364.93	7	3,612.82	7	
1/4	148.48	1/4	396.38	1/4	644.01	1/4	891.30	1/4	1,139.12	1/4	1,387.00	1/4	1,634.89	1/4	1,882.77	1/4	2,130.66	1/4	2,378.55	1/4	2,626.43	1/4	2,874.32	1/4	3,122.21	1/4	3,370.09	1/4	3,617.98	1/4	
1/2	153.65	1/2	401.55	1/2	649.15	1/2	896.47	1/2	1,144.28	1/2	1,392.17	1/2	1,640.05	1/2	1,887.94	1/2	2,135.83	1/2	2,383.71	1/2	2,631.60	1/2	2,879.48	1/2	3,127.37	1/2	3,375.26	1/2	3,623.14	1/2	- 1
3/4	158.81	3/4	406.71	3/4	654.29	3/4	901.63	3/4	1,149.44	3/4	1,397.33	3/4	1,645.22	3/4	1,893.10	3/4	2,140.99	3/4	2,388.88	3/4	2,636.76	3/4	2,884.65	3/4	3,132.54	3/4	3,380.42	3/4	3,628.31	3/4	
8	163.98	8	411.88	8	659.44	8	906.79	8	1,154.61	8	1,402.49	8	1,650.38	8	1,898.27	8	2,146.15	8	2,394.04	8	2,641.93	8	2,889.81	8	3,137.70	8	3,385.59	8	3,633.47	8	
1/4	169.14	1/4	417.05	1/4	664.58	1/4	911.95	1/4	1,159.77	1/4	1,407.66	1/4	1,655.55	1/4	1,903.43	1/4	2,151.32	1/4	2,399.20	1/4	2,647.09	1/4	2,894.98	1/4	3,142.86	1/4	3,390.75	1/4	3,638.64	1/4	- 1
1/2	174.31	1/2	422.21	1/2	669.73	1/2	917.11	1/2	1,164.94	1/2	1,412.82	1/2	1,660.71	1/2	1,908.60	1/2	2,156.48	1/2	2,404.37	1/2	2,652.26	1/2	2,900.14	1/2	3,148.03	1/2	3,395.91	1/2	3,643.80	1/2	- 1
3/4	179.47	3/4	427.38	3/4	674.87	3/4	922.28	3/4	1,170.10	3/4	1,417.99	3/4	1,665.87	3/4	1,913.76	3/4	2,161.65	3/4	2,409.53	3/4	2,657.42	3/4	2,905.31	3/4	3,153.19	3/4	3,401.08	3/4	3,648.97	3/4	
9	184.63	9	432.54	9	680.02	9	927.44	9	1,175.27	9	1,423.15	9	1,671.04	9	1,918.92	9	2,166.81	9	2,414.70	9	2,662.58	9	2,910.47		3,158.36	9	3,406.24	-	3,654.07	9	- 1
1/4	189.80	1/4	437.71	1/4	685.16	1/4	932.60	1/4	1,180.43	1/4	1,428.32	1/4	1,676.20	1/4	1,924.09	1/4	2,171.98	1/4	2,419.86	1/4	2,667.75	1/4	2,915.63	1/4	3,163.52	1/4	3,411.41	1/4	3,659.17	1/4	
1/2	194.96	1/2	442.88	1/2	690.30	1/2	937.76	1/2	1,185.59	1/2	1,433.48	1/2	1,681.37	1/2	1,929.25	1/2	2,177.14	1/2	2,425.03	1/2	2,672.91	1/2	2,920.80	1/2	3,168.69	1/2	3,416.57	1/2	3,664.27	1/2	- 1
3/4	200.13	3/4	448.04	3/4	695.45	3/4	942.92	3/4	1,190.76	3/4	1,438.64	3/4	1,686.53	3/4	1,934.42	3/4	2,182.30	3/4	2,430.19	3/4	2,678.08	3/4	2,925.96		3,173.85	3/4	3,421.74		3,669.37	3/4	
10	205.29	10	453.21	10	700.59	10	948.09	10	1,195.92	10	1,443.81	10	1,691.70	10	1,939.58	10	2,187.47	10	2,435.35	10	2,683.24	10	2,931.13	10	3,179.01	10	3,426.90	10	3,673.83	10	
1/4	210.46	1/4	458.37	1/4	705.74	1/4	953.25	1/4	1,201.09	1/4	1,448.97	1/4	1,696.86	1/4	1,944.75	1/4	2,192.63	1/4	2,440.52	1/4	2,688.41	1/4	2,936.29	1/4	3,184.18	1/4	3,432.06	1/4	3,678.28	1/4	- 1
1/2	215.62	1/2	463.54	1/2	710.88	1/2	958.41	1/2	1,206.25	1/2	1,454.14	1/2	1,702.02	1/2	1,949.91	1/2	2,197.80	1/2	2,445.68	1/2	2,693.57	1/2	2,941.46	1/2	3,189.34	1/2	3,437.23	1/2	3,682.74	1/2	- 1
3/4 220.79 3/4 468.70 3/4 716.02 3/4 963.57 3/4 1,211.42 3/4 1,459.30 3/4 1,707.19 3/4 1,955.07 3/4 2,202.96 3/4 2,450.85 3/4 2,698.73 3/4 2,946.62 3/4 3,194.51 3/4 3,442.39 3/4 3,687.20														3/4																	
11	225.95	11	473.87	11	721.17	11	968.73	11	1,216.58	11	1,464.47	11	1,712.35	11	1,960.24	11	하게 하는 기계를 가는 것이다.	11	2,456.01	11	2,703.90	11	2,951.78	-	3,199.67	11	3,447.56	-	3,690.36	11	
1/4	231.11	1/4	479.03	1/4	726.31	1/4	973.89	1/4	1,221.74	1/4	1,469.63	1/4	1,717.52	1/4	1,965.40	-	2,213.29	1/4	2,461.18	1/4	2,709.06	1/4	2,956.95	-	3,204.84	1/4	3,452.72	-	3,693.52	1/4	
1/2	236.28	1/2	484.19	1/2	731.46	1/2	979.05	1/2	1,226.91	1/2	1,474.79	1/2	1,722.68	1/2	1,970.57	1/2	2,218.45	1/2	2,466.34	1/2	2,714.23	1/2	2,962.11		3,210.00	1/2	3,457.89	-	3,696.68	1/2	
3/4	241.44	3/4	489.36	3/4	736.60	3/4	984.22	3/4	1,232.07	3/4	1,479.96	3/4	1,727.85	3/4	1,975.73	3/4	2,223.62	3/4	2,471.50	3/4	2,719.39	3/4	2,967.28	3/4	3,215.16	3/4	3,463.05	-	3,699.85	3/4	
			S ONLY TO MAN			THE TOP I	LIP OF MMC VA	LVE.																				IN.	TERTEK (CALE	3 BRETT
NOTE:	GAUGE POINT L	OCATED I	N GEOMETRIC C	CENTER O	FTANK																			DATE	STRAPPED 7	7/15/08 E	Y: JLF		_	"	/ //

NOTE: FOR GREATER ACCURACY, BARGE SHOULD BE UPRIGHT AND ON EVEN KEEL

DATE STRAPPED 7/15/08 BY: JLF DATE COMPUTED: 7/28/08 BY: WHF DATE ISSUED: 7/29/08